



FS
FLIGHT
CONTROL
www.fs-flightcontrol.com

FS-FlightControl

Manual

Instructor Operator Station

for Microsoft Flight Simulator, Prepar3D and X-Plane



FS-FlightControl · AB-Tools GmbH

E-mail: info@fs-flightcontrol.com · Internet: www.fs-flightcontrol.com

Marsstraße 78, 80335 München, Germany · Phone: +49 89 38898588 · Fax: +49 89 38898589

Bank Account: Grenke Bank AG · IBAN: DE 49 20130400 0060270139 · BIC: GREBDEH1XXX

Register: Amtsgericht München, HRB 202859 · Finance Office: München für Körperschaften · VAT ID DE273587389

Table of Contents

SETTINGS	1
<i>Simulator Related Settings</i>	1
Simulator	1
Select Simulator Type	1
Simulator Settings for Prepar3D/FSX/FSW	2
Simulator Settings for X-Plane	4
Position	7
General	7
Conditions	7
Weather Engine	7
Motion	7
Brunner Elektronik	7
Third Party	8
ProSim	8
AST	9
Project Magenta	9
Flight Sim Labs	9
Active Sky	9
PFPX	10
Aerosoft Airbus	10
Wilco Airbus	10
Mindstar	10
Flight1	11
General	11
<i>Aircraft Related Settings</i>	11
Aircraft Profile	11
Profile Settings	11
Position	12
Final Position	12
Vectors Position	13
Base Position	13
Downwind Position	13
Airworks	13
Options on Position Change	14
Airport/Runway Restriction	14
Map Colors	15
Colors and Text Settings	15
Map Other	19
Auto Zoom	19
Aircraft Display	19
Reposition	20
Compass Rose	20
Other	21
Pushback	21
Speed Options	21
Aircraft	21
Aircraft Warnings	21
Aircraft Gauge Options	22

Custom Buttons	24
Other	25
Statistics	25
Google Earth Export	26
Third Party	26
Use Third Party Aircraft Options	26
Other Settings	26
Position	26
General	26
Flight Situation Presets	27
Map	27
Data Update Rate	27
Grid and Minimum Sector Altitude (MSA) Display	28
Aircraft Information Text	28
Display Options	29
Online Networks	30
Points of Interest (POIs)	30
Holdings	31
Flight Plan	31
Flight Plan Folder	31
Conditions	31
ILS Visibility	32
Sound	32
Real-Time Weather Source	32
Other	32
View/Slew	33
Custom Camera Positions	33
Other	34
Failures	35
Color Settings	35
Other	35
Statistics	35
Color Settings	35
Recording	36
Approach Options	37
Network	37
FS-FlightControl Client	37
Program Close Options	39
Status Page for Web Display	39
Mobile Devices	40
Android and iOS Client	41
Units	41
Altitude Unit	41
Temperature Unit	42
Atmospheric Pressure	42
Weight Unit	42
Short Distance Unit	42
Far Distance Unit	42
Weight Unit	43
Speed Unit	43
Liquid/Fuel Unit	43

Visibility Unit	43
Thrust Unit	44
Torque Unit	44
GEO Position	44
Color Settings	44
Access Control	45
Simulator Access Control Settings	45
User Access Control	48
Other	51
Input and Help	51
Display Options	51
Program Startup Options	51
Online Network Status URLs	52
Main Buttons	52
Unpause Delay	52
Settings Password Protection	53
Print Options	53
Reset Window Location/Size	54
Send GPS Data	54
Other	55

SETTINGS

Customize this program to your needs with detailed, even aircraft-specific settings. Change map colors, SimConnect settings and many more options available.


But although a lot of very detailed customization options are available in these modules, FS-FlightControl is designed in a way that you do not have to touch anything here to just use the program.

It is perfectly usable with the default settings and only if you need something special then this is the right place to look at.

Simulator Related Settings


All settings in this area will be saved together with the corresponding simulator.

Simulator



At the very first program start, one simulator is automatically created, but you can add more simulators and then switch between them at any time.

Select Simulator Type

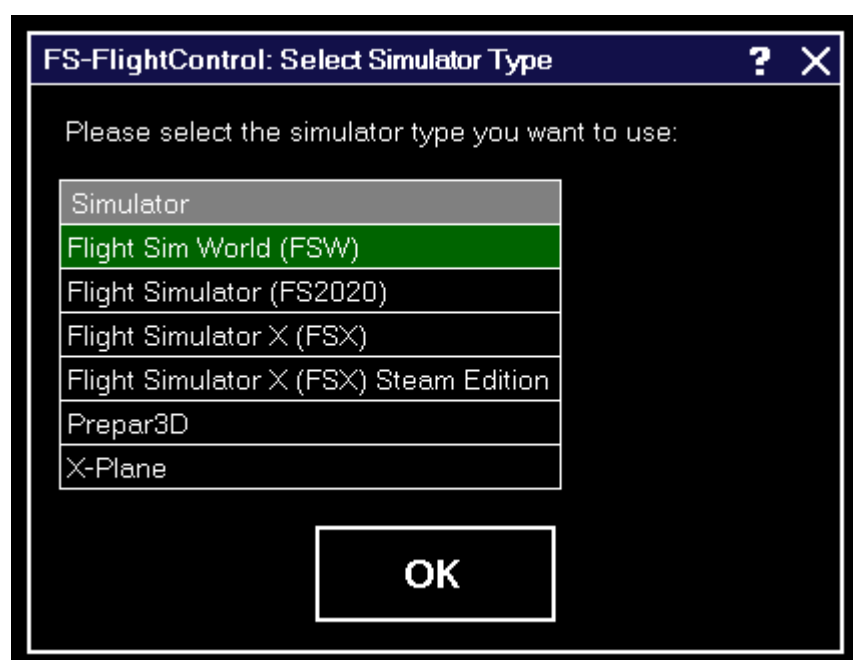

After you have clicked on the button Create New Simulator, this dialog will appear asking you

which type of simulator you want to create.

Simulator Settings for Prepar3D/FSX/FSW

Simulator Settings

Main Settings

Simulator Type: **Prepar3D**

Simulator Name:

Simulator Documents Folder:

Browse

Activate Simulator

Delete Simulator

Navigation Data Update

Navigation Data Expected in Folder:
C:\Users\A-bre\AppData\Roaming\FS-Flight Control\NavData

Current Data:

Provider: **Navigraph FMS Data**

Cycle: **1901**

Revision: **1**

Found Data:

Provider: **Navigraph FMS Data**

Cycle: **1901**

Revision: **1**

☐ Use NavAids/Frequencies from Navigation Data

Navigation data reload not necessary.

Reload Navigation Data

Database Build

Main Directory of Prepar3D:

Browse

AppData Directory of Prepar3D:

Browse

Path to Prepar3D "scenery.cfg":

Browse

☐ Use NavAids/Frequencies from Navigation Data

Database was built on 3/24/2020 6:38:38 PM.

Build Database

(Open FS-FlightControl data directory in Explorer)

SimConnect

☐ Local Flight Simulator Installation

☒ Remote Flight Simulator Installation

Host or IP: Port:

Please ensure SimConnect is enabled for network use. Config Wizard

Apply Changes and Reconnect

If a simulator of type Prepar3D, FSX or FSW is selected these settings will be available.

Main

Main Settings

Simulator Type: **Prepar3D**

Simulator Name:

Simulator Documents Folder:

Browse

Activate Simulator

Delete Simulator


Below the not changable simulator type you can define a custom name for this simulator.

Additionally you can choose the simulator documents folder which is automatically detected if the


FS-FlightControl Manual: <https://www.fs-flightcontrol.com/en/manual/>

simulator is installed locally.

If the selected simulator is currently not active, you can use the buttons **Activate Simulator** to activate it or **Delete Simulator** to delete it again.

 **Note:** You can change the active simulator also by clicking on the connection status in the **Title Bar**.

Database Build

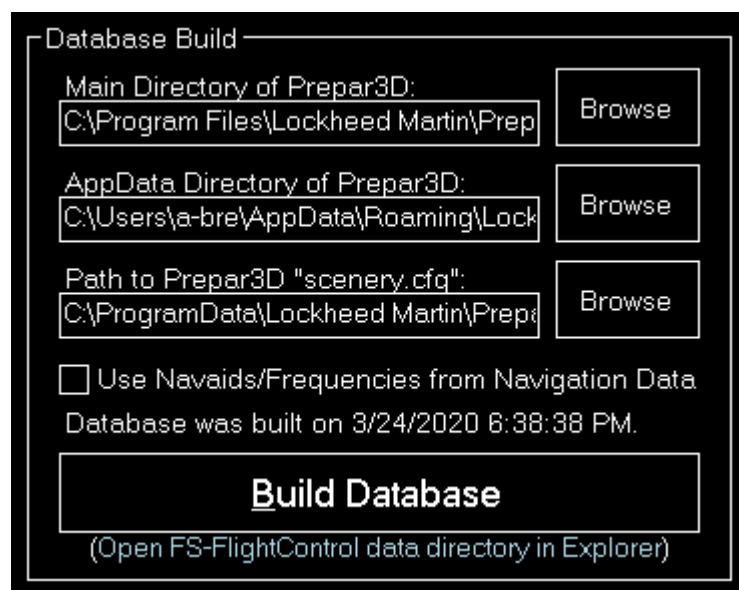

The screenshot shows the 'Database Build' dialog box. It contains three text input fields, each followed by a 'Browse' button. The first field is 'Main Directory of Prepar3D:' with the path 'C:\Program Files\Lockheed Martin\Prep'. The second field is 'AppData Directory of Prepar3D:' with the path 'C:\Users\la-bre\AppData\Roaming\Lock'. The third field is 'Path to Prepar3D "scenery.cfg":' with the path 'C:\ProgramData\Lockheed Martin\Prep'. Below these fields is a checkbox labeled 'Use Nav aids/Frequencies from Navigation Data' which is currently unchecked. Below the checkbox, it says 'Database was built on 3/24/2020 6:38:38 PM.' At the bottom, there is a large 'Build Database' button and a smaller note '(Open FS-FlightControl data directory in Explorer)'.

Database Build

Main Directory of Prepar3D:
C:\Program Files\Lockheed Martin\Prep Browse

AppData Directory of Prepar3D:
C:\Users\la-bre\AppData\Roaming\Lock Browse

Path to Prepar3D "scenery.cfg":
C:\ProgramData\Lockheed Martin\Prep Browse

☐ Use Nav aids/Frequencies from Navigation Data


Database was built on 3/24/2020 6:38:38 PM.

Build Database

(Open FS-FlightControl data directory in Explorer)

The database build is explained in the **Database Build** installation section.

Navigation Data Update

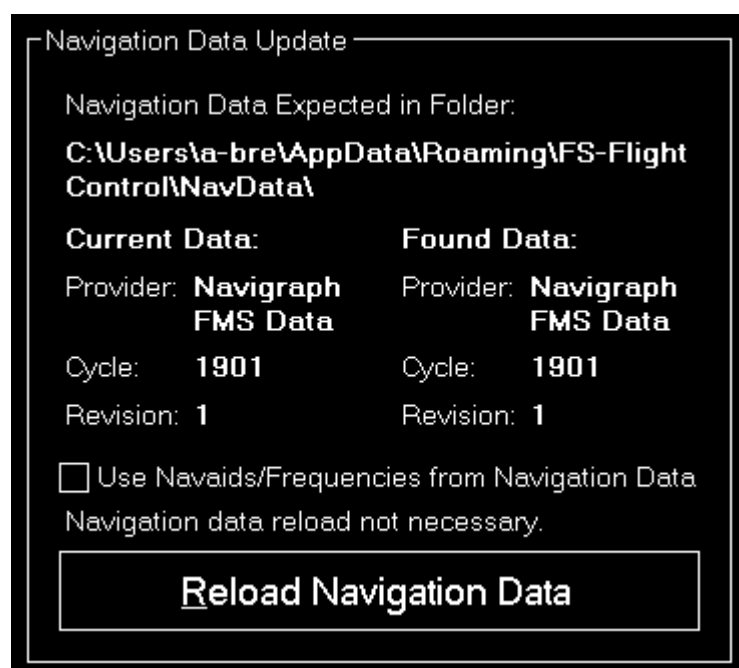

The screenshot shows the 'Navigation Data Update' dialog box. It displays the 'Navigation Data Expected in Folder:' as 'C:\Users\la-bre\AppData\Roaming\FS-Flight Control\NavData\'. Below this, it compares 'Current Data' and 'Found Data'. Both show 'Provider: Navigraph FMS Data', 'Cycle: 1901', and 'Revision: 1'. Below the comparison, there is a checkbox labeled 'Use Nav aids/Frequencies from Navigation Data' which is currently unchecked. Below the checkbox, it says 'Navigation data reload not necessary.' At the bottom, there is a large 'Reload Navigation Data' button.

Navigation Data Update

Navigation Data Expected in Folder:
C:\Users\la-bre\AppData\Roaming\FS-Flight Control\NavData

Current Data:	Found Data:
Provider: Navigraph FMS Data	Provider: Navigraph FMS Data
Cycle: 1901	Cycle: 1901
Revision: 1	Revision: 1


☐ Use Nav aids/Frequencies from Navigation Data

Navigation data reload not necessary.

Reload Navigation Data

This area is explained in the **Navigation Data Update** dialog section.


SimConnect

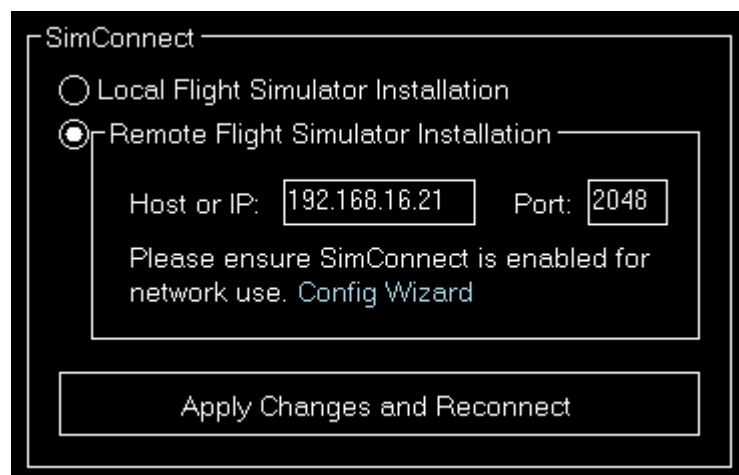

The screenshot shows the 'SimConnect' configuration window. It has two radio buttons: 'Local Flight Simulator Installation' and 'Remote Flight Simulator Installation'. The 'Remote' option is selected. Below the 'Remote' option, there are two text input fields: 'Host or IP:' containing '192.168.16.21' and 'Port:' containing '2048'. Below these fields is a text instruction: 'Please ensure SimConnect is enabled for network use. Config Wizard'. At the bottom of the window is a large button labeled 'Apply Changes and Reconnect'.


You can choose here if FS-FlightControl should connect to a local or remote flight simulator installation.

Remote Flight Simulator Installation

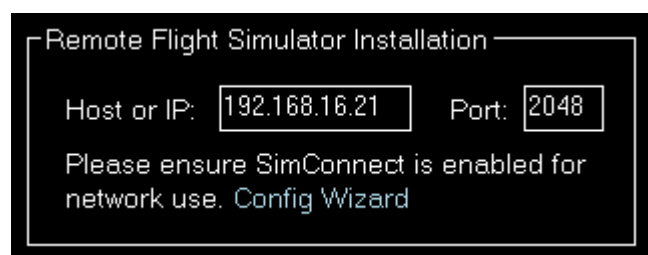


The screenshot shows the 'Remote Flight Simulator Installation' configuration window. It contains two text input fields: 'Host or IP:' with the value '192.168.16.21' and 'Port:' with the value '2048'. Below these fields is a text instruction: 'Please ensure SimConnect is enabled for network use. Config Wizard'.

If you want FS-FlightControl to access a flight simulator installation that is not located on the same computer as FS-FlightControl itself, these SimConnect Network Access parameters need to be defined.

 **Note:** To make this configuration as easy as possible you can use the **SimConnect Network Wizard**.

Simulator Settings for X-Plane

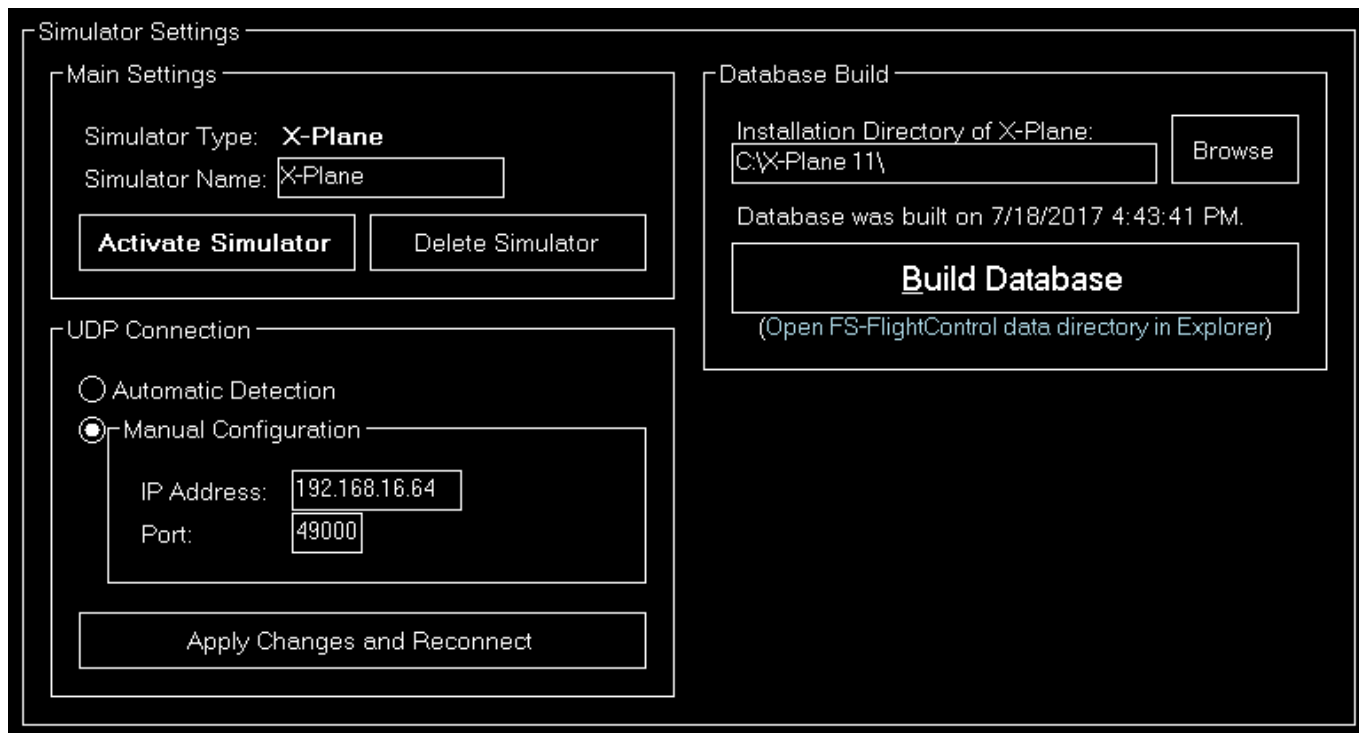

The screenshot shows a 'Simulator Settings' window with two main sections. The 'Main Settings' section on the left includes a 'Simulator Type' dropdown set to 'X-Plane', a 'Simulator Name' text box containing 'X-Plane', and two buttons: 'Activate Simulator' and 'Delete Simulator'. Below this is a 'UDP Connection' section with radio buttons for 'Automatic Detection' and 'Manual Configuration' (which is selected). The 'Manual Configuration' section contains an 'IP Address' text box with '192.168.16.64' and a 'Port' text box with '49000', followed by an 'Apply Changes and Reconnect' button. The 'Database Build' section on the right shows the 'Installation Directory of X-Plane' as 'C:\X-Plane 11\' with a 'Browse' button. It also states 'Database was built on 7/18/2017 4:43:41 PM.' and features a large 'Build Database' button with the instruction '(Open FS-FlightControl data directory in Explorer)' below it.

If a simulator of type X-Plane is selected these settings will be available.

Main




This screenshot shows a close-up of the 'Main Settings' section. It displays the 'Simulator Type' as 'X-Plane', the 'Simulator Name' as 'X-Plane' in a text box, and the 'Activate Simulator' and 'Delete Simulator' buttons.

Below the not changable simulator type you can define a custom name for this simulator.


If the selected simulator is currently not active, you can use the buttons `Activate Simulator` to activate it or `Delete Simulator` to delete it again.

Database Build

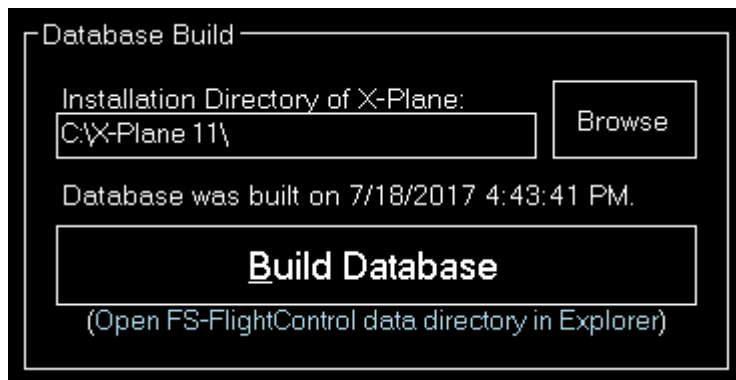

The database build is explained in the **Database Build** installation section.


UDP Connection

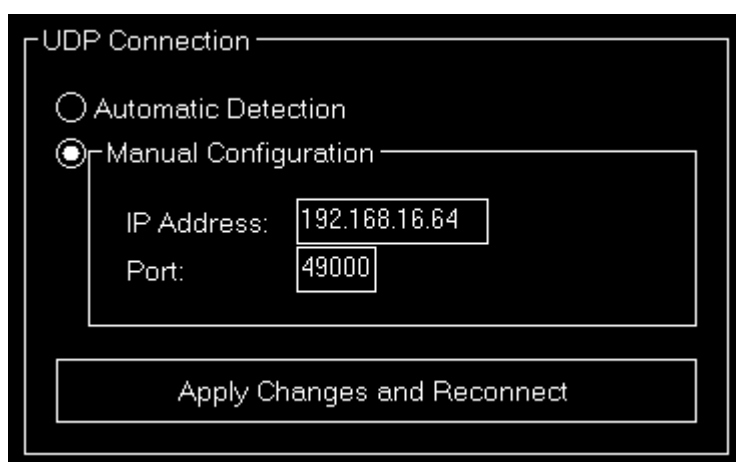

You can choose here if the connection parameters should be detected automatically or you want to set them manually.

In most cases all connection parameters can be automatically detected even if X-Plane does not run on the same computer as FS-FlightControl.

Manual Configuration

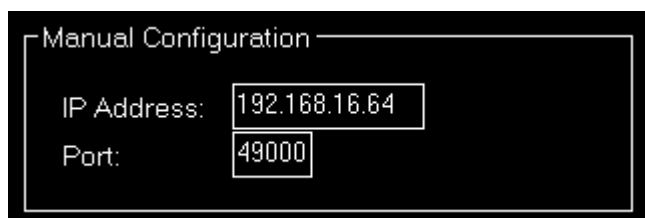


But if the automatic detection does not work for any reason, you can configure the connection manually here.


Position

These settings are related to the **Position** module.

General

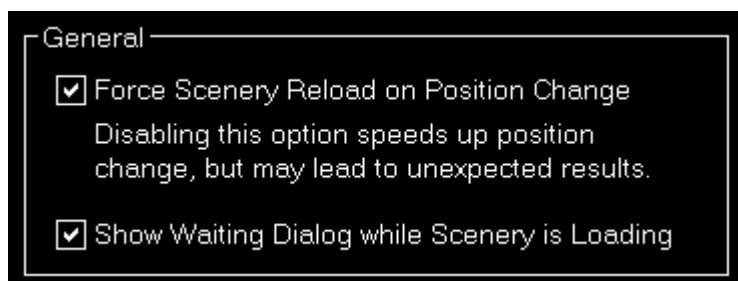

You can choose here if the scenery should be reloaded after a position is changed.

 **Note:** The forced scenery reload is enabled by default as disabling it may lead to unexpected results (like aircraft crash) especially if the new location is far away from the old one.

Conditions

These settings are related to the **Conditions** module.

Weather Engine




Let FS-FlightControl know here which software is used as weather engine to ensure all features of the **Conditions** module work properly.

 **Note:** For Active Sky additional parameters need to be entered in the **Third Party** settings first.

Motion

These settings are related to the **Motion** module.

Brunner Elektronik

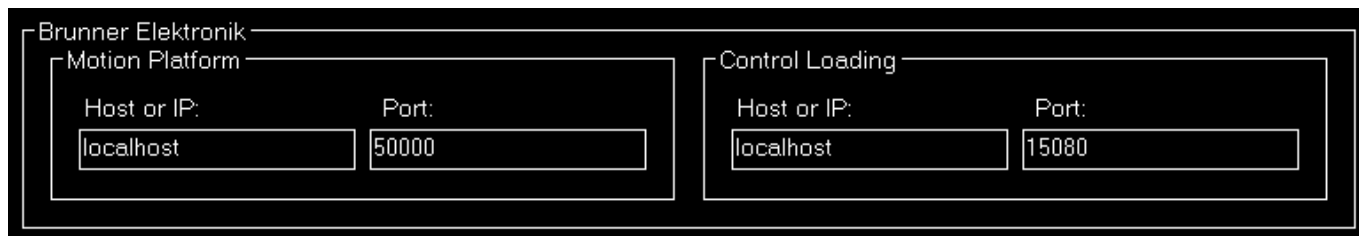

The screenshot shows a configuration window for Brunner Elektronik. It contains two main sections: 'Motion Platform' and 'Control Loading'. Each section has a 'Host or IP' field and a 'Port' field. In the 'Motion Platform' section, the 'Host or IP' is 'localhost' and the 'Port' is '50000'. In the 'Control Loading' section, the 'Host or IP' is 'localhost' and the 'Port' is '15080'.

This section allows to configure the motion interface to Brunner Elektronik products.

Motion Platform



The screenshot shows the 'Motion Platform' configuration window. It has a 'Host or IP' field and a 'Port' field. The 'Port' field is set to '50000'.


Enter the host or IP as well as the UDP port that should be used to control the motion platform.


Control Loading



The screenshot shows the 'Control Loading' configuration window. It has a 'Host or IP' field and a 'Port' field. The 'Port' field is set to '15080'.

The host or IP as well as the TCP port that should be used to connect to the CLS2Sim software by Brunner Elektronik can be entered here. The Brunner Elektronik connection then can be used in the **Motion** module.

 Note: CLS2Sim version v3.20.0 or newer is required.

 Note: Please make sure that Remote control is enabled for TCP in the CLS2Sim settings and the TCP port is set accordingly (only TCP is needed for FS-FlightControl connection). UDP communication is not used by FS-FlightControl.

Third Party

Here you can define necessary parameters to connect to third party products supported by FS-FlightControl.

ProSim



The host or IP as well as the port that should be used to connect to ProSim can be entered here. The ProSim connection then can be used in the **Flight Plan** and **Failures** modules.

AST



AST

Host or IP: localhost Port: 16105

The host or IP as well as the port that should be used to connect to AST (Aircraft Simulation Technology) can be entered here. The AST connection then can be used in the **Failures** module.

Project Magenta



Project Magenta

Path to "NetDir" Folder: D:\NetDir\ Browse

The path to the NetDir of Project Magenta can be entered here. The Project Magenta connection then can be used in the **Flight Plan** module; the **Failures** module uses FSUIPC to connect to Project Magenta.

Flight Sim Labs



Flight Sim Labs

Path to "FSLabs" Folder: C:\ProgramFiles(x86)\LockheedMartin\ Browse

The path to the FSLabs directory of Flight Sim Labs below the flight simulator directory can be entered here. The direct Flight Sim Labs connection then can be used in the **Flight Plan** module.

Active Sky



Active Sky

Host or IP: localhost Port: 19285

The host or IP as well as the port that should be used to connect to Active Sky 16 (SP1 required) can be entered here. The Active Sky connection then can be used in the **Conditions** module.

PFPX



You can enter the path to the PFPX documents directory here. The PFPX connection then can be used in the **Flight Plan** module.

Aerosoft Airbus

Aerosoft Airbus

Folder of "MCDUFPL[N]Data*.txt":

C:\Users\A-bre\Documents\Aerosoft\Air

Browse

Now you can enter the path to the Aerosoft Airbus documents directory (also the older Extended Version is supported) here. The Aerosoft Airbus connection then can be used in the **Flight Plan** module.

Wilco Airbus

Wilco Airbus

Folder of "fmgc.cfg":

C:\ProgramFiles(x86)\Steam\steamapp

Browse

You can enter the path to the Wilco/FeelThere Airbus directory here. The Wilco Airbus connection then can be used in the **Flight Plan** module.

Mindstar

Mindstar

Path to "G1000.ini":

F:\Program Files (x86)\Mindstar\FlightSim

Browse


SimConnect Failures Event Offset:

11F00 (must be between 11000 and 11FA0 hex)


You can enter the path to the Mindstar G1000.ini file here. The Mindstar connection then can be used in the **Failures** module.

Additionally the offset for the SimConnect event IDs need to be specified as hex value. Starting from this ID the SimConnect events will be assigned to the Mindstar G1000 failures.

Flight1

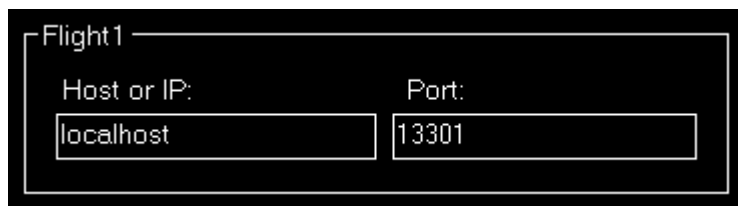

The host or IP as well as the port that should be used to connect to Flight1 VISPRO flight simulator plug-in can be entered here. The Flight1 connection then can be used in the **Failures** module.

 Note: To be able to trigger the Flight1 G1000 failures from FS-FlightControl not only the Flight1 G1000 plug-in needs to be installed in flight simulator, but also the Flight1 VISPRO plug-in.

General



Additional you can define the time interval for third party synchronization here.

Aircraft Related Settings

All settings in this area will be saved together with the corresponding aircraft profile if aircraft related settings are enabled.


Aircraft Profile



By default aircraft related settings are disabled as this is not needed for many users, especially also if you only use FS-FlightControl with one specific aircraft type.

But if you want to use FS-FlightControl together with very different aircraft types it makes sense to enable aircraft related settings here.

Profile Settings

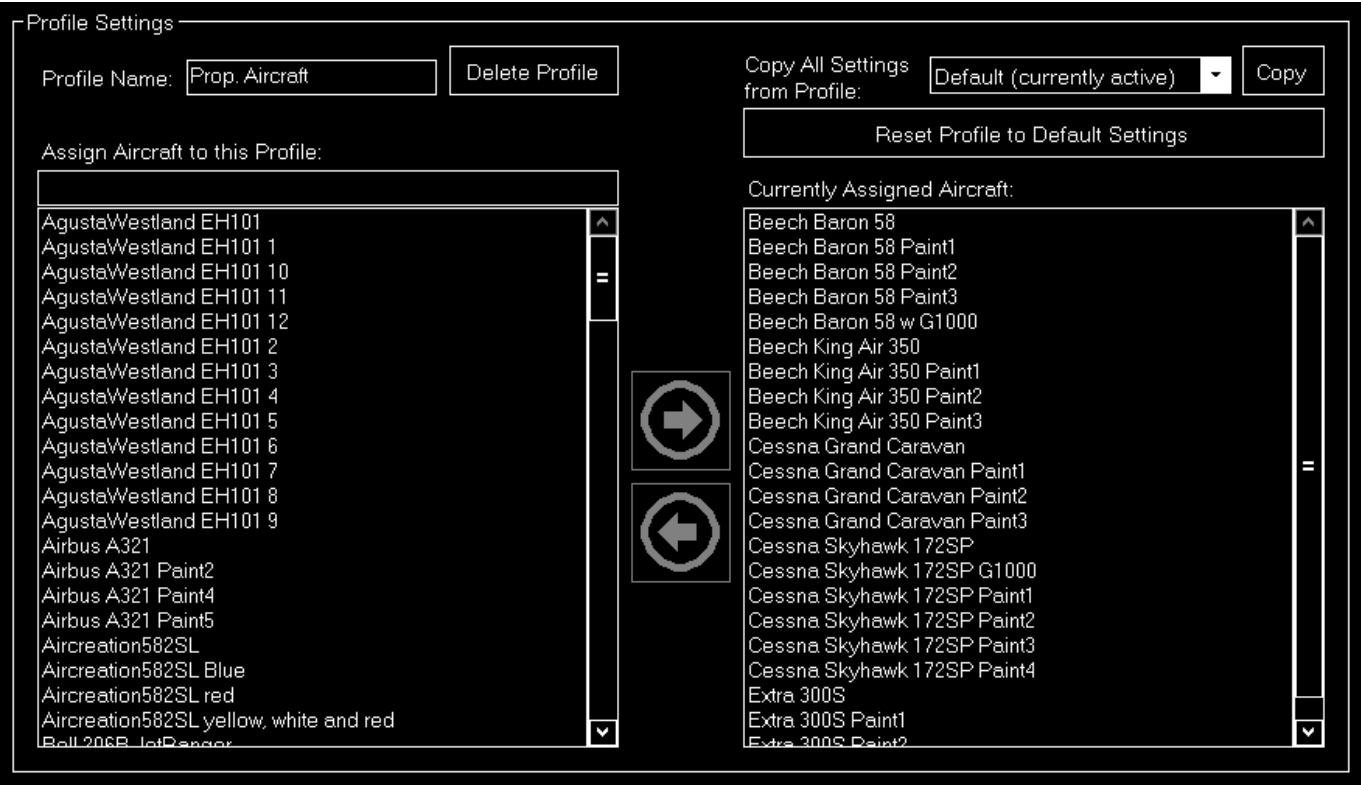

If aircraft related settings are enabled the profile settings section gets enabled as well.

You can edit or create new aircraft profiles here and change the flight simulator aircraft that are assigned to the current aircraft profile.

Additionally you can copy all settings from another profile or revert all settings to default.

Position

These settings are related to the **Position** module.

Final Position

Final Position

Short Final:

3

NM

Long Final:

8

NM

Vertical Offset to
Glideslope
(+higher, -lower):

0

ft

Horizontal Offset
to Glideslope
(-left, +right):

0

ft

Here you can define the distance of the short and long final approach as well as a vertical and horizontal offset to the glideslope if you want.

Vectors Position

Vectors Position		
Vector Leg Distance:	<input type="text" value="2"/>	NM
Final Leg Distance:	<input type="text" value="6"/>	NM
Final Intercept Angle:	<input type="text" value="30"/>	°

The distances for the vector positions can be changed here as well as the final intercept angle.

Base Position

Base Position		
Base Leg Distance:	<input type="text" value="4"/>	NM
Final Leg Distance:	<input type="text" value="6"/>	NM

Define here the distances for the base positions.

Downwind Position

Downwind Position		
Distance Back:	<input type="text" value="1"/>	NM
Lateral Distance to Runway:	<input type="text" value="4"/>	NM
Altitude Above Ground:	<input type="text" value="2,000"/>	ft

Here you can define the lateral distance to the runway for the downwind positions.

In contrast to the other positions where the altitude is calculated based on the runway glideslope automatically, the altitude for the downwind positions can be customized here.

Airworks

Airworks		
Airworks 1	50	FL
Airworks 2	100	FL
Airworks 3	200	FL
Airworks 4	300	FL

You can define the flight levels of the four airworks buttons here.

Options on Position Change

Options on Position Change	
Speed (IAS):	150 kt
Pitch:	0 °
<input type="checkbox"/> Set Gear State:	<input type="checkbox"/> Down
<input type="checkbox"/> Set Flaps Pos.:	0
Set:	<input checked="" type="checkbox"/> HDG <input checked="" type="checkbox"/> CRS/OBS <input checked="" type="checkbox"/> CRS/OBS 1 <input checked="" type="checkbox"/> CRS/OBS 2 <input checked="" type="checkbox"/> ILS Frequency <input checked="" type="checkbox"/> NAV 1 <input checked="" type="checkbox"/> NAV 2


Depending on the aircraft capabilities you can change the parameters that are used when the aircraft is positioned.

This includes whether the heading, course (CRS) respectively omni bearing selector (OBS) or ILS frequency (if the runway is ILS enabled) should be set automatically with the aircraft position change to a certain approach.

Airport/Runway Restriction

Airport/Runway Restriction	
<input type="checkbox"/> Restrict Runway Length	
Minimum:	10,000 ft Maximum: 20,000 ft
Runway Surface:	<input checked="" type="checkbox"/> Hard <input checked="" type="checkbox"/> Soft <input checked="" type="checkbox"/> Water
<input checked="" type="checkbox"/> Show Helipads	

You have the option to hide certain airports and runways based on the runway length and surface here. You can also choose if helipads should be displayed.

 Note: This will be applied everywhere in the program and will completely remove those airports and runways. On the **Map** airports will be displayed as long as at least one of the runways meet the criteria here.

Map Colors

These settings are related to the **Map** module.

Colors and Text Settings

In this area you can highly customize the appearance of the map.

We decided to put this into the aircraft related settings. Although this seems not to be aircraft related at first sight, it enables you to emphasize certain map parts based on the currently loaded aircraft: For example when using a small aircraft you might want to highlight more the small gates and do not care a lot about ILS, but when using a big jet the large gates are much more interesting. Same goes for other parts on the map which might be more interesting for certain aircraft types than others.

Select map type: ☒ Normal ☐ Normal for Print ☐ Street Map ☐ Satellite Map ☐ Height Map

All colors and text sizes can be defined per map type.

Therefore please first select the map type.

Colors and Text Sizes for Map Type

Structure Color	Min. Zoom	Text Color	Min. Zoom	Font Size
User Aircraft		User Aircraft Info		<input type="text" value="7"/>
AI Aircraft		AI Aircraft Info		<input type="text" value="7"/>
VATSIM Aircraft		VATSIM Airc. Info		<input type="text" value="7"/>
VATSIM Airport		(Used to draw APP, TWR and GND cycles.)		
VATSIM FIR/UIR		VAT. FIR/UIR Info		<input type="text" value="10"/>
IVAO Aircraft		IVAO Aircraft Info		<input type="text" value="7"/>
IVAO Airport		(Used to draw APP, TWR and GND cycles.)		
IVAO FIR/UIR		IVA. FIR/UIR Info		<input type="text" value="10"/>
PilotEdge Aircraft		PilotEdge Aircraft		<input type="text" value="7"/>
PilotEdge Airport		(Used to draw APP, TWR and GND cycles.)		
PilotEdge FIR		PilotE. FIR Info		<input type="text" value="10"/>
Airport		Airport Name		<input type="text" value="10"/>
Runway		Runway Ident		<input type="text" value="8"/>
ILS		ILS Ident		<input type="text" value="8"/>
Axis		Marker Type		<input type="text" value="8"/>
Marker				<input type="text" value="8"/>
Taxi Path		Taxi Point Name		<input type="text" value="8"/>
Taxi Center Line				
Taxi Holding Point				
Tower				
VOR		VOR Name		<input type="text" value="8"/>
NDB		NDB Name		<input type="text" value="8"/>
Airspace		Airspace Name		<input type="text" value="8"/>
Airway		Airway Name		<input type="text" value="8"/>
Waypoint		Waypoint Ident		<input type="text" value="8"/>
Wayp. SID/STAR		Waypoint Ident		<input type="text" value="10"/>
Weather Station		Weath. St. Name		<input type="text" value="8"/>
User POI		User POI Name		<input type="text" value="10"/>
Compass Rose				
Weather Info		Weather Info		<input type="text" value="8"/>
Map Info		Map Info Text		<input type="text" value="8"/>
Holding		Holding Info		<input type="text" value="8"/>
Measure		Measure Info		<input type="text" value="8"/>
Trace Aircraft				
Flight Plan Path				
SID/STAR Path				
Country		Country		<input type="text" value="12"/>
Country Border				
Ocean				
Lake		Lake		<input type="text" value="8"/>
River		River		<input type="text" value="8"/>
Grid		MSA		<input type="text" value="14"/>

Here all currently defined colors and text sizes are displayed for the selected map type.

The **Structure Color** is always the color of the item itself, like the runway surface of the runway, whereas **Text Color** the color of the corresponding text is, like the runway idents of the runway.

The **Min. Zoom** next to the **Structure Color** defines the minimum map zoom level needed that this structure (like the runway surface) is shown. Accordingly, the second **Min. Zoom** next to the **Text Color** defines the minimum map zoom level needed that the corresponding text (like the runway idents) is shown.

Font Size, the last column, enables you to define the size of the displayed text.

Parking

Parking

Color Default

Color Gate

Color Ramp

Name Prefix for Type:	Font Size Gate/Ramp:
Fuel: <input type="text" value="F"/>	Default: <input type="text" value="8"/>
Cargo: <input type="text" value="C"/>	Small: <input type="text" value="7"/>
Military: <input type="text" value="M"/>	Medium: <input type="text" value="8"/>
	Large: <input type="text" value="10"/>

Min. Zoom:

This area lets you define colors and text sizes for the different parking types like gates and ramps depending on their sizes.

Additionally you can define text prefixes to be used for a certain type like fuel, cargo or military.

Tooltip

Tooltip

Color Text

Color Background

Max. Zoom:

Font Size:


When hovering over certain map elements like an airport a tooltip is displayed showing the full name of the airport.

In this section you can define the appearance of this tooltip as well as up to which map zoom level the tooltip should be displayed.

Map Other

These settings are related to the **Map** module.

Auto Zoom

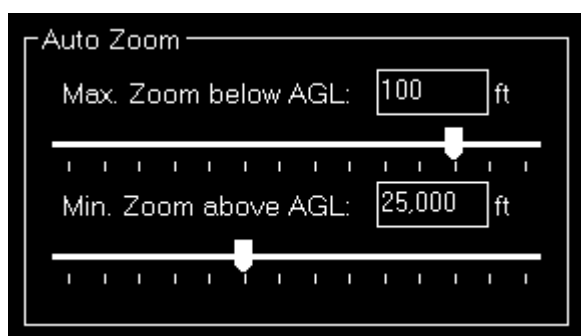


The **Map** module also features an auto zoom function which will zoom the map in and out according to the current aircraft altitude.

You can configure this feature here by first entering the maximum zoom level (fully zoomed in) that should be reached if the aircraft is below the entered altitude above ground.

Then, for the upper end, you define the minimum zoom level (fully zoomed out) that should be reached above the entered altitude.

Between these two altitudes the zoom will be equally divided automatically.

Aircraft Display

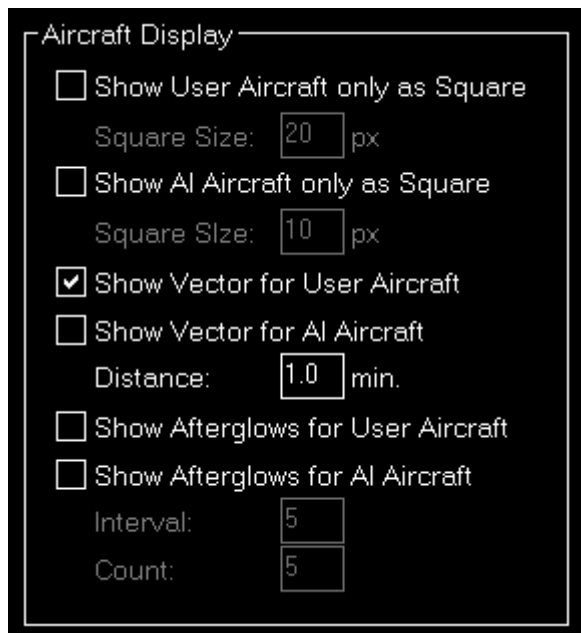

Aircraft Display

- ☐ Show User Aircraft only as Square
Square Size: px
- ☐ Show AI Aircraft only as Square
Square Size: px
- ☒ Show Vector for User Aircraft
- ☐ Show Vector for AI Aircraft
Distance: min.
- ☐ Show Afterglows for User Aircraft
- ☐ Show Afterglows for AI Aircraft
Interval:
Count:


Here you can choose from certain options related to the display of the aircraft on the map.

First you can define if the user and/or AI aircraft are only shown as squares instead of an aircraft image. In this case you can also enter a size for the squares.

Furthermore you can enable or disable a distance vector being displayed in front of each user and/or AI aircraft. In this case you can enter the length of the vector in minutes.

Additionally so called afterglows - dots behind the aircraft - can be enabled or disabled for user and/or AI aircraft. In this case you can enter an interval as well as the number of dots that should be displayed.

Reposition

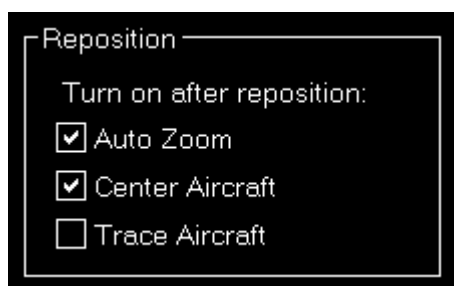


Reposition

Turn on after reposition:

- ☒ Auto Zoom
- ☒ Center Aircraft
- ☐ Trace Aircraft


In this section you can define if certain map features are automatically turned on after the map reposition function was used.

Compass Rose

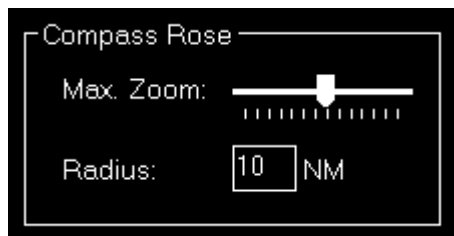

Use these settings to define the maximum zoom level up to the compass rose (when this function is enabled) should be displayed and how wide its radius should be.

Other

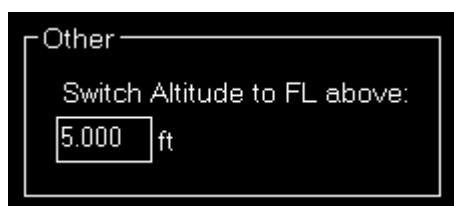


Here you can define at which altitude the display should switch from precise altitude display to flight level.

 **Note:** Above this altitude it will also switch from show MSL altitude to indicated altitude.

Pushback

These settings are related to the **Pushback** module.

Speed Options

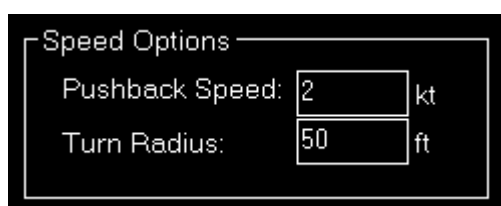


Here you can define the pushback speed as well as the turn radius.

Aircraft

These settings are related to the **Aircraft** module.

Aircraft Warnings

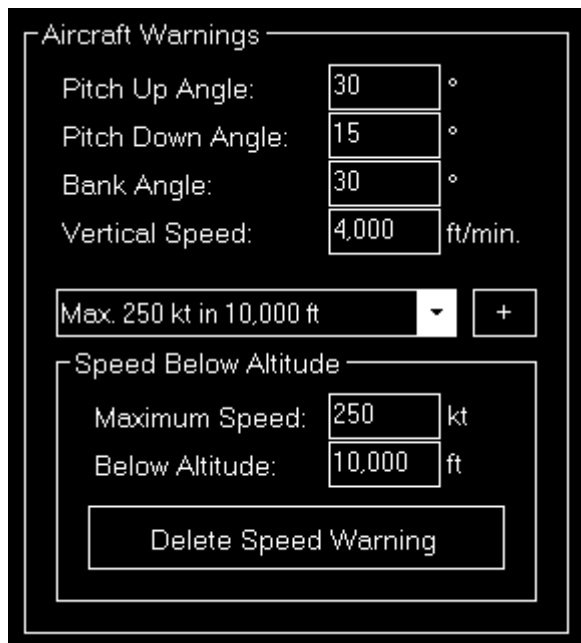

Aircraft Warnings

Pitch Up Angle: °

Pitch Down Angle: °

Bank Angle: °

Vertical Speed: ft/min.

Max. 250 kt in 10,000 ft


Speed Below Altitude

Maximum Speed: kt

Below Altitude: ft

Here you can set limits for some parameters like pitch or bank angle for the aircraft.

Speed Below Altitude

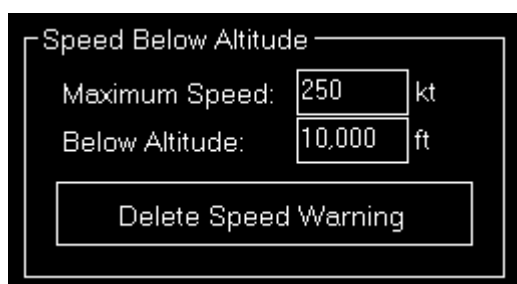

Speed Below Altitude


Maximum Speed: kt

Below Altitude: ft

Additionally you can define maximum speeds below certain altitudes above mean sea level (MSL).


These settings are used to change the color of the corresponding value to red on the **Aircraft** module and also to show warning indicators when exporting graph data to Google Earth on the **Statistics** module.

Aircraft Gauge Options

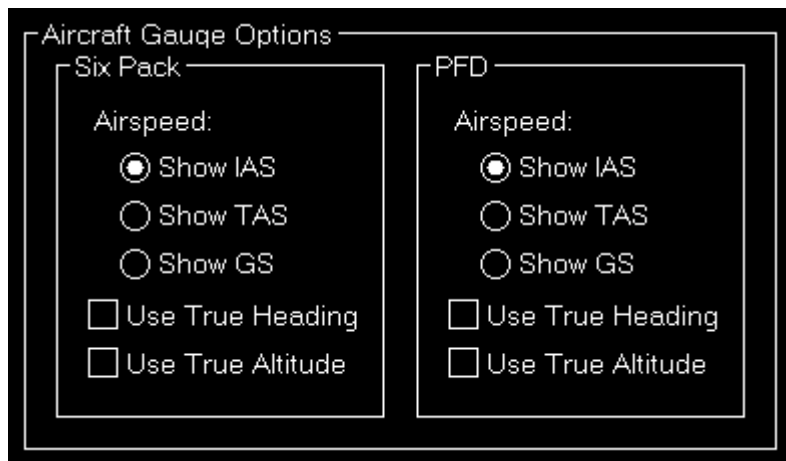

Here you can choose certain display options for the aircraft gauges.


Six Pack

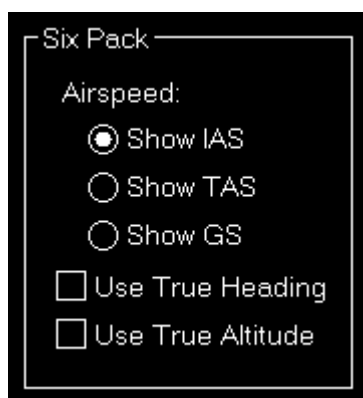

Choose weather you want to see indicated airspeed (IAS), true airspeed (TAS) or ground speed (GS) being displayed.


Also you can select if you would like true heading (in contrast to magnetic heading) and true altitude (in contrast to indicated altitude) being used.

PFD

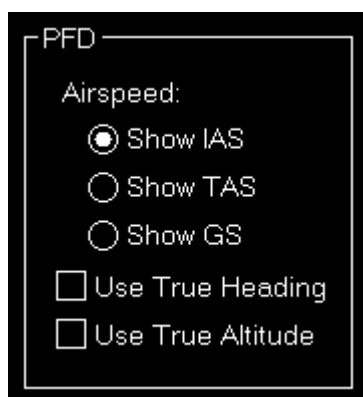

For the Primary Flight Display (PFD) you have the same display options as for the six pack **above**.


Custom Buttons

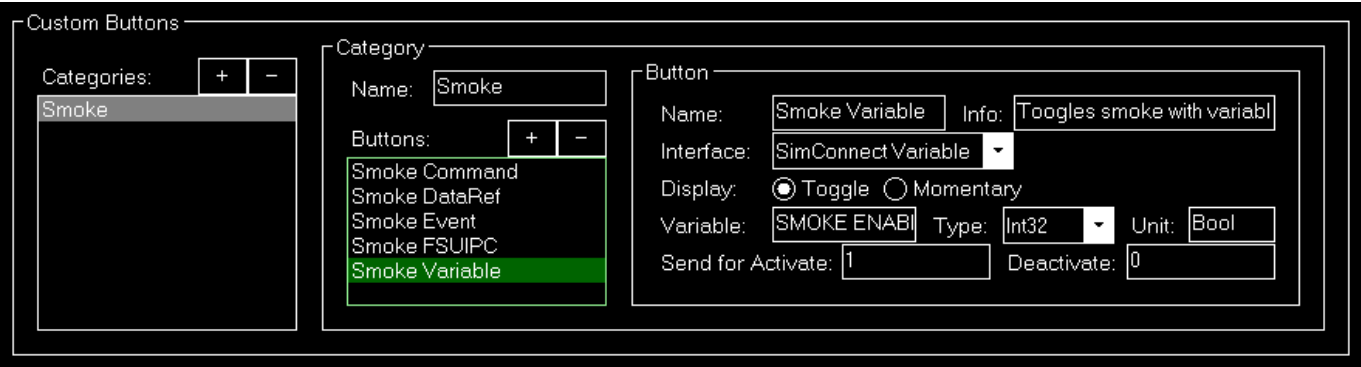

You can create custom buttons here that will trigger certain flight simulator functions directly.


These buttons can be arranged into categories which you can create first.

Category

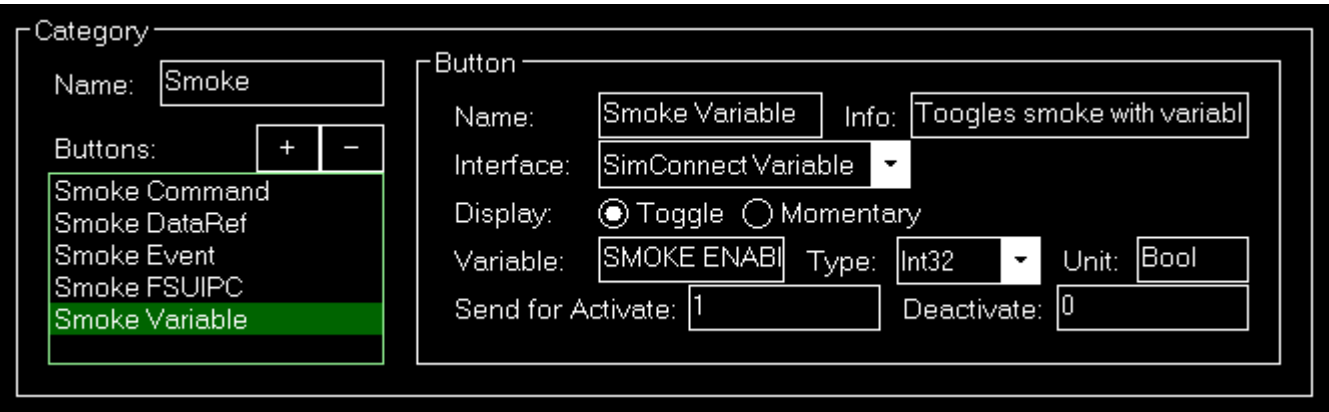

Once you assigned a name to the category you can add any number of buttons to it.

Button

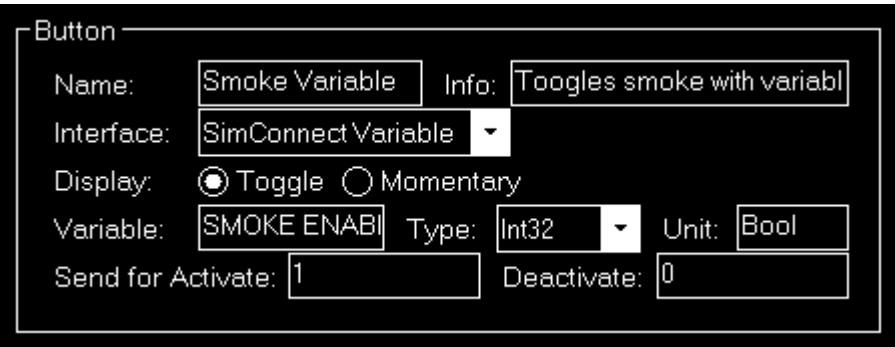

The button needs a name first and an optional info text which will be displayed as tool tip.

Next you need to select the interface that should be used for this button and choose if the button should have a toggle functionality or it should be momentary only: In case of toggle it will send two

different values (like on and off) depending on its current state and in case of momentary there is no state and it sends always the same value.

Depending on the interface selected you need to enter a certain data or command ID, assign a data type and a unit to it.

Furthermore, you can enter a value that should be sent to activate and - in case of a toggle button - also a value to deactivate.


Examples and Reference

In the following you will find one example for each interface supported:

Interface	Data or Command ID	Type	Unit	Send for Activate	Send for Value Deactivate
SimConnect Event	SMOKE_TOGGLE	-	-	0	0
SimConnect Variable	SMOKE_ENABLE	Int32	Bool	1	0
X-Plane Command	sim/flight_controls/smoke_toggle	-	-	-	-
X-Plane DataRef	sim/operation/failures/rel_smoke_cpit	-	-	6	0
FSUIPC Offset	05D8	Int16	-	1	0

And here some references to create those examples:

Interface	Reference
SimConnect Event	Lockheed Martin Website for Prepar3D, Microsoft Website for FSX
SimConnect Variable	Lockheed Martin Website for Prepar3D, Microsoft Website for FSX
X-Plane Command	Commands.txt in Resources\plugins below X-Plane installation folder
X-Plane DataRef	DataRefs.txt in Resources\plugins below X-Plane installation folder
FSUIPC Offset	FSUIPC4 Offsets Status.pdf in Modules\FSUIPC Documents below Prepar3D/FSX installation folder

 Note: Using these custom buttons requires considerable knowledge on how the internals of Prepar3D/FSX/X-Plane and their add-ons work. We do not provide any support on how a certain variable, event, command, DataRef or offset can be used!

Other

Other

☒ Show Flaps Position as Degrees

Here you can define if flap positions should be shown as degree number.

Statistics

These settings are related to the **Statistics** module.

Google Earth Export



Google Earth Export

Interval Between Flight Track Points: sec.

Range to Include VORs, NDBs and Waypoints: NM

Define all Google Earth export related settings in this area.

Every certain time interval a flight track point is shown in Google Earth with detailed flight information. You can set this time interval here.

Additionally you can define the range for including VORs, NDBs and waypoints if their export is enabled.


Third Party

Here you can enable certain aircraft-specific functionality related to supported third party products.

Use Third Party Aircraft Options



You can choose which third party aircraft options should be used.

 Note: For some options additional parameters need to be entered in the third party **simulator settings** first.


Other Settings

All settings in this area are not simulator and not aircraft related and will be saved globally.

Position

These settings are related to the **Position** module.

General

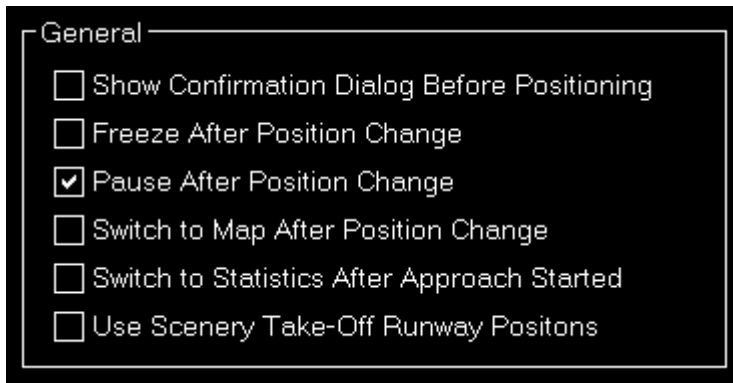


First you can enable an additional **confirmation dialog** before the airport position is changed.

You can also enable or disable some automatizations after an aircraft position is changed.

First choose if position freeze or pause should be enabled after aircraft move.

Additionally you can define if the program should automatically switch to the **Map** module after a position change respectively to the **Statistics** module when an approach is started.

Flight Situation Presets



You can choose here to not automatically save the flight plan together with a flight situation preset.

Map

These settings are related to the **Map** module.

Data Update Rate



You can define here how often the map view gets updated.

By default that is set to once per second.


Custom Update Rate




If you uncheck the Default Update Rate checkbox you can define the update rate yourself.

The slider then ranges from very low (every 60 visual frames on flight simulator) to very high (every

single visual frame).

 **Note:** Please keep in mind that setting the data update rate to very high may lead to performance issues.


Grid and Minimum Sector Altitude (MSA) Display

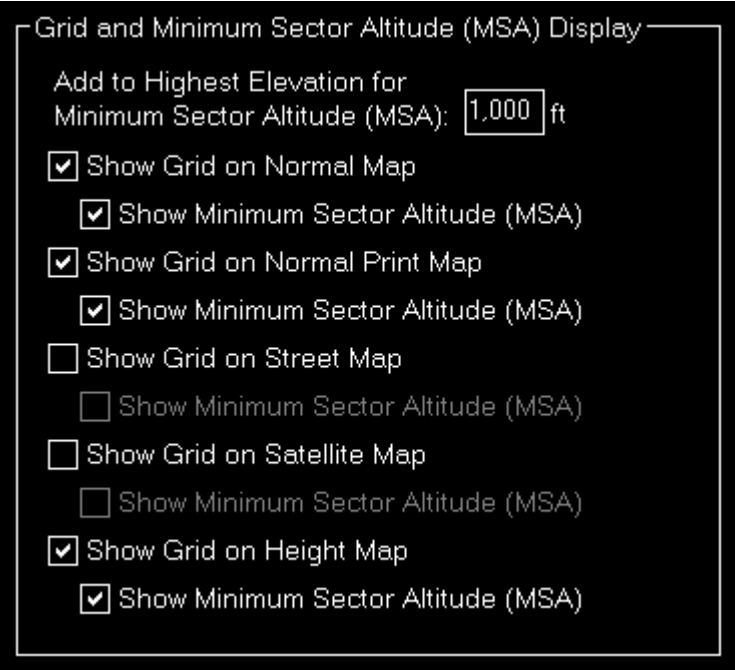

First you can define here the altitude that is added to the highest elevation in each sector when calculating the Minimum Sector Altitude (MSA).

Additionally you can choose when the map grid including the Minimum Sector Altitude (MSA) is displayed in the first place.

Aircraft Information Text

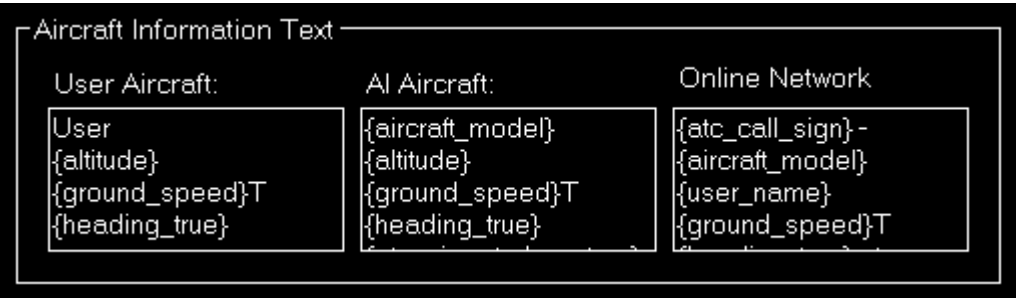

You can customize the text that is displayed next to the aircraft here.

Different texts can be defined for the user aircraft, AI aircraft as well as aircraft from online networks.

Following placeholders are available within those texts:


Placeholder	Description	User	AI	Online
{latitude}	Aircraft latitude.	X	X	X

Placeholder	Description	User	AI	Online
{longitude}	Aircraft longitude.	X	X	X
{altitude}	"GROUND" if on ground, altitude MSL below switch to FL map setting and FL above that.	X	X	X
{altitude_indicated}	Aircraft indicated altitude.	X	X	
{altitude_msl}	Aircraft altitude above mean sea level (MSL).	X	X	X
{altitude_agl}	Aircraft altitude above ground level (AGL).	X	X1	
{airspeed_indicated}	Aircraft indicated speed (IAS).	X	X1	
{airspeed_true}	Aircraft true speed (TAS).	X	X1	
{ground_speed}	Aircraft ground speed.	X	X	X
{heading_magnetic}	Magnetic aircraft heading.	X	X1	
{heading_true}	True aircraft heading.	X	X	X
{vertical_speed}	Aircraft vertical speed.	X	X	
{aircraft_title}	Aircraft title.	X	X1	X
{aircraft_type}	Aircraft type (like the manufacturer).		X1	
{aircraft_model}	Specific aircraft model.		X1	X
{current_state}	Current aircraft state: Like Parking, Taxi or In Flight.	X	X	
{atc_call_sign}	Call sign.		X1	X
{atc_airline}	Airline name.		X1	
{atc_flight_number}	Flight number.		X1	
{atc_airport_departure}	Departure airport as filed.		X1	X
{atc_airport_arrival}	Arrival airport as filed.		X1	X
{atc_flight_rules}	Flight rules as filed.		X1	X
{atc_airport_alternate}	Alternate airport as filed.			X
{atc_route}	Flight route as filed.			X
{atc_remarks}	Flight plan remarks.			X
{atc_etd}	Estimated time of departure as filed or (for online aircraft) actual time after departure.		X1	X2
{atc_ete}	Estimated time en-route as filed.			X2
{atc_eta}	Estimated time of arrival as filed.		X1	X2

 Note X1: Not available for X-Plane.


 Note X2: Not available for PilotEdge.

Display Options

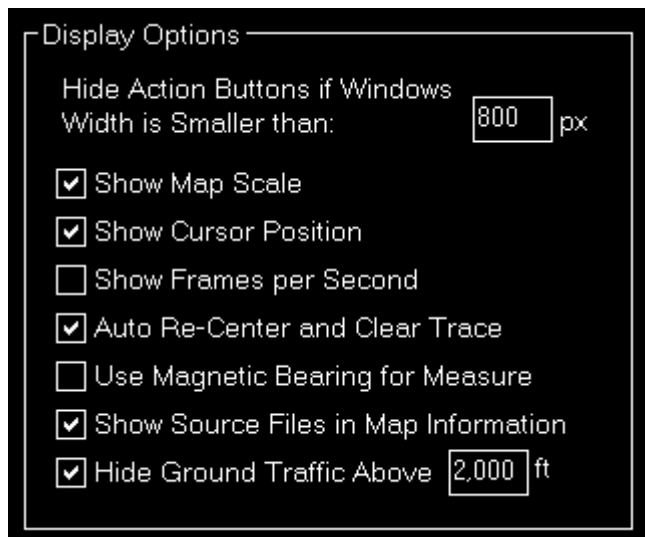

You can define several display options here.

First you can set a window width below that the left and right action buttons are hidden.

 **Note:** This is only used for detached map windows.

Below that you can choose if you want the map scale, cursor position and frames per second displayed on the bottom of the map view or not.

Additionally you can disable the automatic re-center of the map and clear aircraft trace (if enabled) after the aircraft position has been changed from the flight simulator itself (after there was a crash, for example).

There is also an option to enable or disable the display of scenery source files in the **map information** dialog: This might help with identifying issues during database build.


If you do not like to see other aircraft on the map that are on ground while you are flying you can hide ground traffic above a certain altitude above ground level.

Online Networks



If you enter here your user ID of the available online networks your own user aircraft will not appear additionally as AI aircraft.

Points of Interest (POIs)

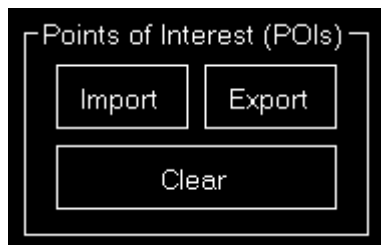

Here you can import or export points of interest (POIs) as CSV files.

Also removing all the existent points of interest is possible

Holdings



You can define here how large the entry sectors are drawn around the holding.

Additionally you can choose if also the special direct entry (next to the regular direct entry) is displayed.

Flight Plan

These settings are related to the **Flight Plan** module.

Flight Plan Folder



Here you can change the path to the saved flight plans of flight simulator.

Conditions

These settings are related to the **Conditions** module.

ILS Visibility

ILS Visibility

	Decision Height	Runway Visibility
CAT I	<input type="text" value="200"/> ft	<input type="text" value="550"/> m
CAT I LTS	<input type="text" value="200"/> ft	<input type="text" value="400"/> m
CAT II	<input type="text" value="100"/> ft	<input type="text" value="300"/> m
CAT IIIa	<input type="text" value="50"/> ft	<input type="text" value="180"/> m
CAT IIIb	<input type="text" value="30"/> ft	<input type="text" value="46"/> m
CAT IIIc	<input type="text" value="0"/> ft	<input type="text" value="10"/> m

In this section the ILS Visibility presets can be customized.

You can define the decision height as well as the runway visibility for each ILS category.

Sound

Sound

☐ Force Mute/Unmute on Simulator Connect

☐ Mute

If you would like the simulator to be always muted or unmuted after connection is established you can set this here.

Real-Time Weather Source

Real-Time Weather Source

☒ NOAA ☐ VATSIM ☐ IVAO ☐ PilotEdge

This setting is ignored if Active Sky is used as weather engine in the current simulator.

Define here the real-time weather source that should be used for receiving weather METAR data if this is not provided by flight simulator directly.

In this connection you can choose from NOAA (National Oceanic and Atmospheric Administration), VATSIM (Virtual Air Traffic Simulation) and IVAO (International Virtual Aviation Organization).

Other

Other

☒ Enable Simplified Weather Control

By default the Simplified Weather Control is activated.

That means that FS-FlightControl takes full control of the simulator weather and this way can always ensure what you see in the **Conditions** module is synchronized with the simulator weather.

This allows especially the **custom weather** interface to be considerably simplified as there is no longer a need to actually send a weather change due to it being synchronized in the background all the time anyway.

Therefore normally you want to keep this option enabled.

The only time you might consider disabling it is if you try to use external weather tools that are not supported through an interface by FS-FlightControl. In this case you should disable this option here as otherwise FS-FlightControl will constantly try to override the weather change by other tools.

View/Slew

These settings are related to the **View/Slew** module.

Custom Camera Positions

Custom Camera Positions

Current

X: 0.00 ft Y: 0.00 ft Z: 0.00 ft
Pitch: 0.00° Bank: 0.00° Roll: 0.00°

☒ Enable Custom Position 1
☐ Enable Custom Position 2
☐ Enable Custom Position 3

Custom Position 1

Name: CPT View
X: -4.50 ft Y: 0.00 ft Z: 0.00 ft
Pitch: 0.00° Bank: 0.00° Roll: 0.00°
Use Current Test

Custom Position 2

Name: Center View
X: 0.00 ft Y: 0.00 ft Z: 0.00 ft
Pitch: 0.00° Bank: 0.00° Roll: 0.00°
Use Current Test

Custom Position 3

Name: F/O View
X: 0.00 ft Y: 0.00 ft Z: 0.00 ft
Pitch: 0.00° Bank: 0.00° Roll: 0.00°
Use Current Test

If you own a commercial license this section allows you to define custom camera positions to reduce the parallax effect.

Current




X:	0.00 ft	Y:	0.00 ft	Z:	0.00 ft
Pitch:	0.00°	Bank:	0.00°	Roll:	0.00°

Here you can see the current camera position.

 Note: This information is currently only provided by X-Plane.

Custom Position

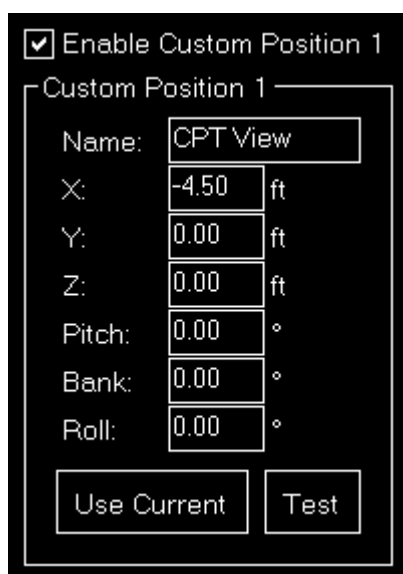

☒ Enable Custom Position 1

Custom Position 1

Name: CPT View

X: -4.50 ft

Y: 0.00 ft

Z: 0.00 ft

Pitch: 0.00°

Bank: 0.00°

Roll: 0.00°

Use Current Test

You can enable up to three custom positions.

Set a name for the custom position button displayed in the **View/Slew** module first.

Then you can define an offset for all six degrees of freedom.

Use the Use Current button to take over the current camera values or the Test button to send the manually inserted values to the simulator to test the effect.

Other



Other


☐ Hide Back to Cockpit Buttons

You can hide the back to cockpit buttons here if they are, for example, not supported by the aircraft model.

Failures

These settings are related to the **Failures** module.

Color Settings

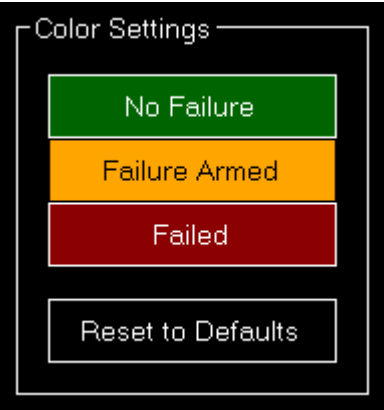

Use this area to change the colors.

You can also use the button `Reset to Defaults` to revert all your color changes.

Other



Choose here if random failures should be automatically re-enabled on program start if they were enabled before.

Statistics

These settings are related to the **Statistics** module.

Color Settings

In this area you can customize all colors used to draw the statistics graphs.



All colors can be defined per display type.

Therefore please first select if you want to change the colors for the normal in program display or for


printout.

Revert to Defaults



You can easily revert all colors to their defaults by using the Revert to Defaults button.


Colors for Display Type

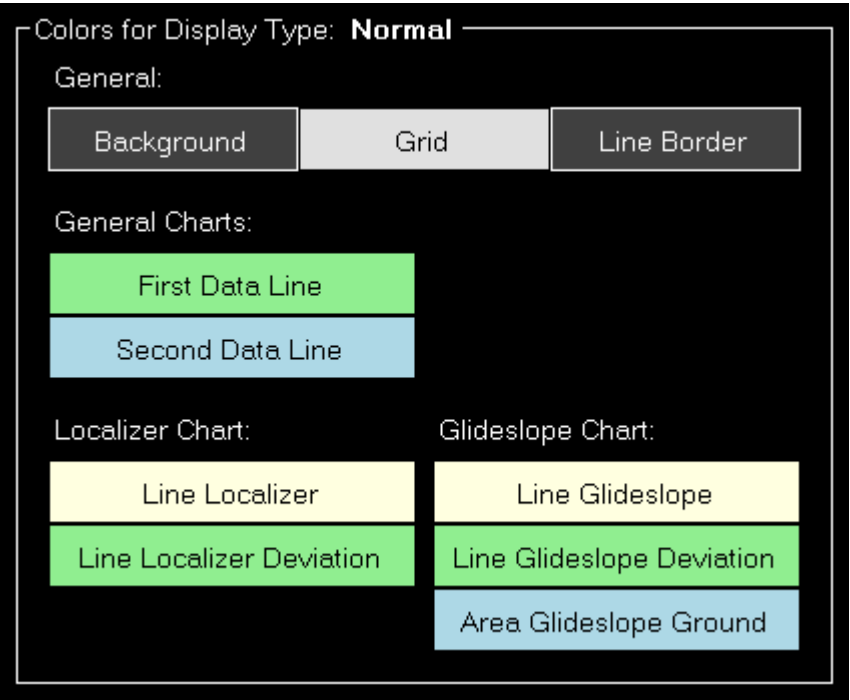

Here all currently defined colors are displayed for the selected display type.

Click on any of the buttons to select a different color.

Recording

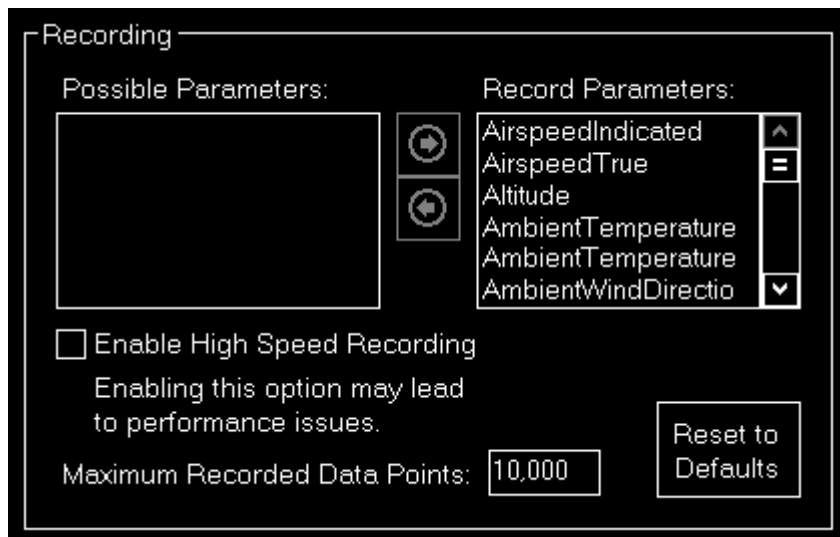

Recorded parameters are available to be displayed in the **general statistics** and are also included in the CSV data export.

If you own a commercial license you can choose from a wide range of parameters and include them in the recording.

Additionally you can also enable high speed recording which will record values with the maximal possible frequency offered by the simulator (otherwise, by default, the recording is only once per second).

Especially on computers with little amount of memory you have the option to limit the amount of recorded data points.

Use the button **Reset to Default** to set the recording options back to the defaults.

Approach Options




You can choose if the localizer information from the simulator should be used during approach recording or the localized deviation should always be calculated internally.


Network

These settings are related to the **Network** module.


FS-FlightControl Client

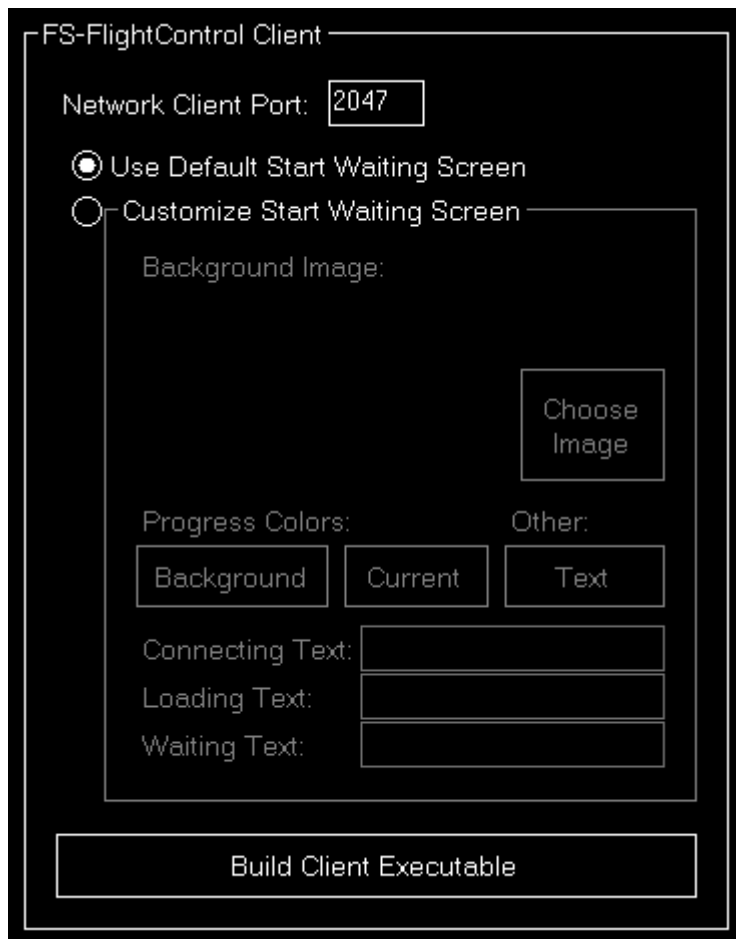

First you can change the network client port here that defaults to 2047, but can be changed to any other port number if needed.

 **Note:** If you change the port you need to re-build the network client executable.

Customize Start Waiting Screen

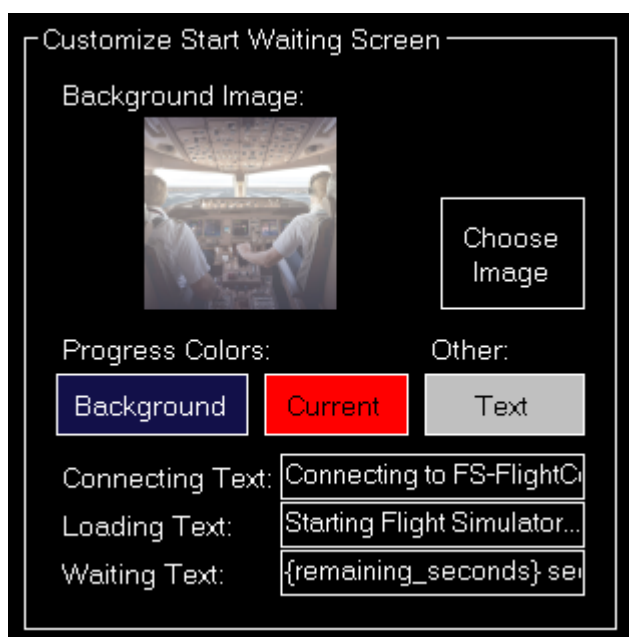


If you own a commercial license you can completely customize the start waiting screen that is shown

on the network client computers.

You can select a background image as well as customize the colors and the shown texts.

In the Remaining Text input field you can use the placeholder {remaining_seconds} to insert the remaining seconds.

Program Close Options

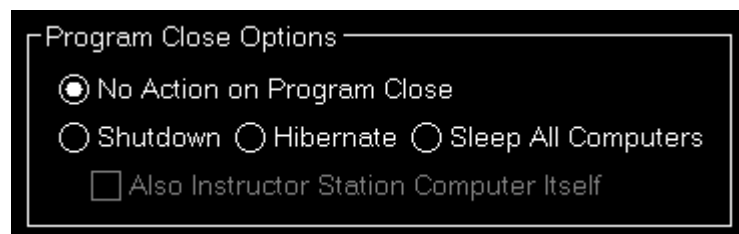


The screenshot shows a dialog box titled "Program Close Options". It contains four radio buttons: "No Action on Program Close" (which is selected), "Shutdown", "Hibernate", and "Sleep All Computers". Below these is a checkbox labeled "Also Instructor Station Computer Itself" which is currently unchecked.

You can define here if a shutdown, hibernate or sleep action should be sent to all connected network computers when the FS-FlighControl software is closed.

Additionally you can decide if the same action should be executed on the computer running the instructor station itself.

Status Page for Web Display

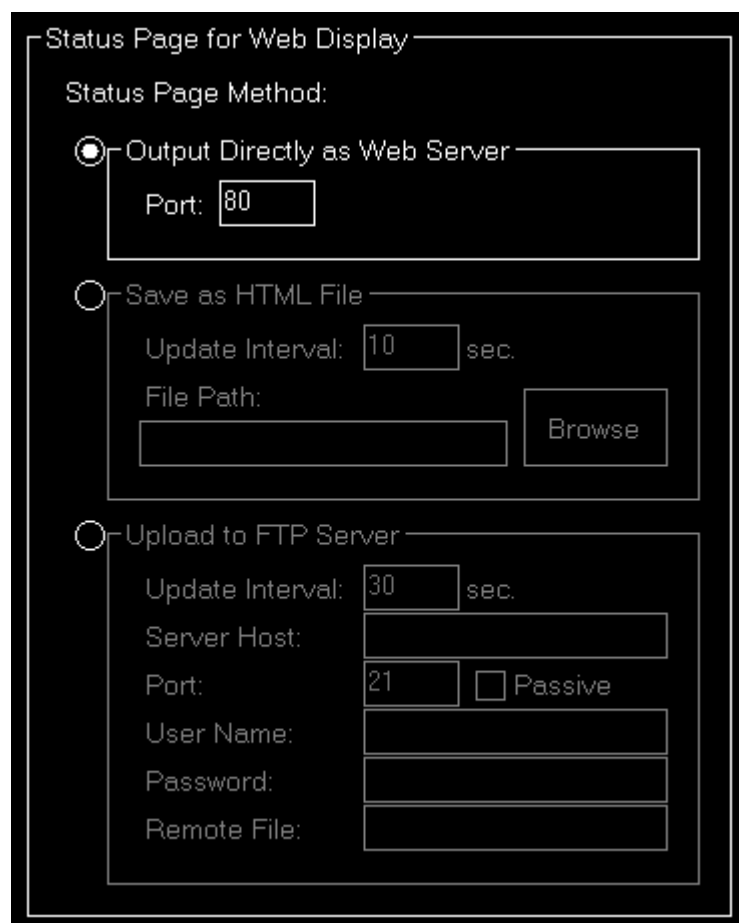

The screenshot shows a configuration window titled "Status Page for Web Display". It has three main sections, each with a radio button selection:

- Status Page Method:**
 - ☒ **Output Directly as Web Server**: Includes a "Port:" field with the value "80".
 - ☐ **Save as HTML File**: Includes an "Update Interval:" field with "10" and "sec.", a "File Path:" field, and a "Browse" button.
 - ☐ **Upload to FTP Server**: Includes an "Update Interval:" field with "30" and "sec.", a "Server Host:" field, a "Port:" field with "21" and an unchecked "Passive" checkbox, a "User Name:" field, a "Password:" field, and a "Remote File:" field.

In this area you can define the method that should be used for the status page output.

Output Directly as Web Server



A screenshot of a configuration window titled "Output Directly as Web Server". It contains a single text input field labeled "Port:" with the value "80" entered.

If this method is selected FS-FlightControl will listen on the defined port for HTTP web requests and will reply with the status page accordingly.


Save as HTML File



A screenshot of a configuration window titled "Save as HTML File". It contains three fields: "Update Interval:" with a value of "10" and "sec.", "File Path:" with a text input field containing "C:\xampp\htdocs\index.html", and a "Browse" button.

This method will save the status page as HTML file to a certain directory location in the defined time interval.

Upload to FTP Server

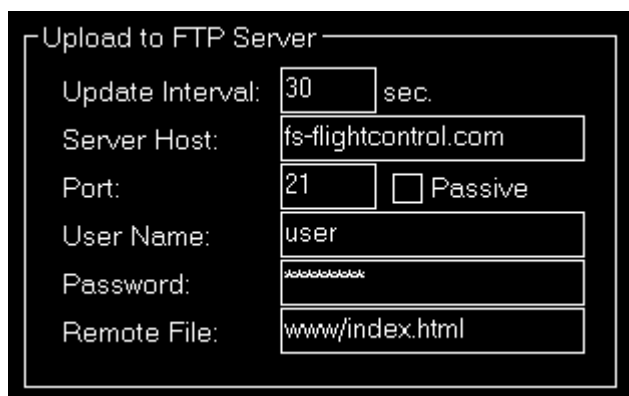

A screenshot of a configuration window titled "Upload to FTP Server". It contains several fields: "Update Interval:" with a value of "30" and "sec.", "Server Host:" with a text input field containing "fs-flightcontrol.com", "Port:" with a value of "21" and an unchecked "Passive" checkbox, "User Name:" with a text input field containing "user", "Password:" with a text input field containing "*****", and "Remote File:" with a text input field containing "www/index.html".


You can also enable this method to automatically upload the status page to a FTP server.

Then you need to define again the update interval as well as all parameters that are needed for FTP server access.

Mobile Devices

This section is related to the mobile devices support.

Android and iOS Client

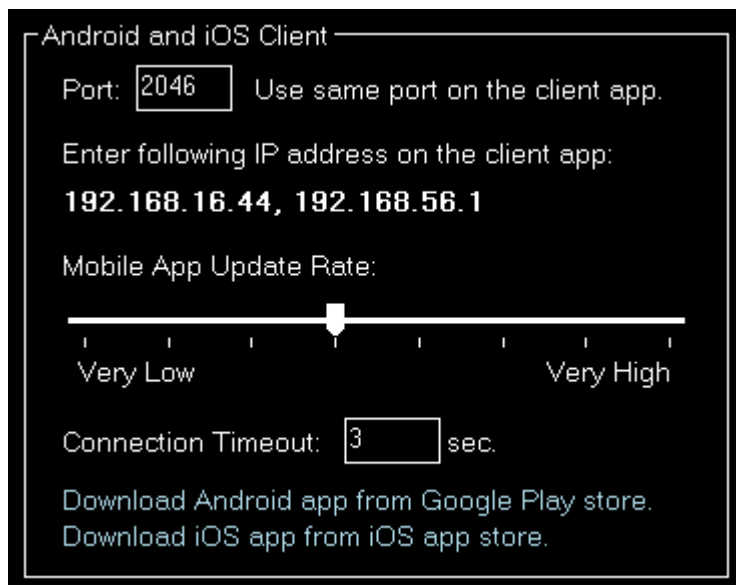

Android and iOS Client

Port: Use same port on the client app.

Enter following IP address on the client app:
192.168.16.44, 192.168.56.1

Mobile App Update Rate:

Very Low Very High


Connection Timeout: sec.

Download Android app from Google Play store.
Download iOS app from iOS app store.

There is an Android client app that makes it possible to use FS-FlightControl also with your Android Tablet device.

You can define the port here that should be used for the connection. It defaults to 2046.

In the following you can see the IP address that you need to enter in the Android app once for connection.

 Note: It rare cases it is possible that there is more than one IP address displayed here. In this case you just need to try which one works.


If you should see a Windows Firewall message popping up - normally on program start - asking you to give FS-FlightControl access please confirm that. Only with this approval you will be able to connect with your mobile device.

You can directly download the Android app from the **Google Play store** as well as the iOS-App from the **iOS App Store**.

Units

Here all units for input as well as output used across the whole program can be defined.

Altitude Unit

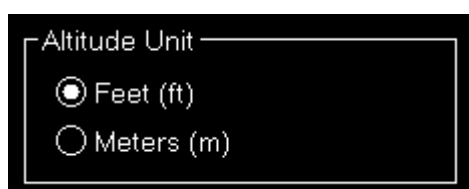

Altitude Unit

☒ Feet (ft)

☐ Meters (m)

Choose if feet (ft) or meters (m) should be used for altitude values.

Temperature Unit

Temperature Unit

☒ Fahrenheit (°F)

☐ Celcius (°C)

Choose if Fahrenheit (°F) or Celcius (°C) should be used for temperature values.

Atmospheric Pressure

Atmospheric Pressure Unit

☒ Hectopascals (hPa)

☐ Inches of Mercury (inHg)

Choose if Hektopascals (hPa) or Inches of Mercury (inHg) should be used for atmospheric pressure values.

Weight Unit

Weight Unit

☒ Kilograms (kg)

☐ Pounds (lbs)

Choose if kilograms (kg) or pounds (lbs) should be used for weight values.

Short Distance Unit

Short Distance Unit

☒ Feet (ft)

☐ Meters (m)

Choose if feet (ft) or meters (m) should be used for short distance values.

Far Distance Unit

Far Distance Unit

☒ Nautical Miles (NM)

☐ Kilometers (km)

Choose if nautical miles (NM) or kilometers (km) should be used for far distance values.

Weight Unit

Weight Unit

☒ Kilograms (kg)

☐ Pounds (lbs)

Choose if kilograms (kg) or pounds (lbs) should be used for weight values.

Speed Unit

Speed Unit

☒ Knots (kt)

☐ Miles per Hour (mph)

☐ Kilometers per Hour (km/h)

Choose if knots (kt), miles per hour (mph) or kilometers per hour (km/h) should be used for speed values.

Liquid/Fuel Unit

Liquid/Fuel Unit

☒ Kilograms (kg)

☐ Pounds (lbs)

☐ US Gallons (gal.)

Choose if kilograms (kg), pounds (lbs) or US gallons (gal.) should be used for liquid and fuel values.

Visibility Unit

Visibility Unit

☐ Feet (ft)


☒ Meters (m)

☐ Kilometers (km)

☐ Statute Miles (M)

Choose if feet (ft), meters (m), kilometers (km) or statute miles (M) should be used for visibility values.

Thrust Unit

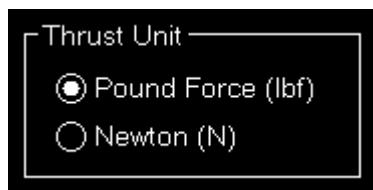


Thrust Unit

☒ Pound Force (lbf)

☐ Newton (N)

Choose if pound force (lbf) or Newton (N) should be used for thrust values.

Torque Unit

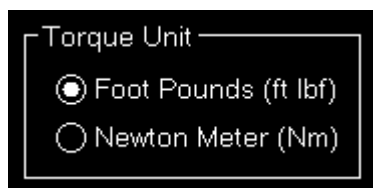


Torque Unit

☒ Foot Pounds (ft lbf)

☐ Newton Meter (Nm)

Choose if foot pounds (ft lbf) or Newton meter (Nm) should be used for torque values.

GEO Position

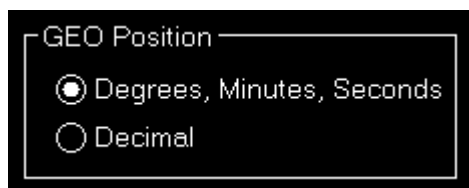

GEO Position

☒ Degrees, Minutes, Seconds

☐ Decimal

Choose if GEO positions should be displayed as degrees, minutes and seconds or as a decimal value.

Color Settings

Color Settings

Main Global Colors:

Background	Foreground
Focused	Disabled
Hyperlink	Hyperlink Active

If Control Area is Colored:

Positively Active	Negatively Active
Intermediate Active	Inactive

If Control Border or Font is Colored:

Full Active	Filled Part
Partly Active	Unfilled Part

Progress Bar:

Filled Part
Unfilled Part

General Status Colors:

Good
Warning
Error or Danger
Neutral

Reset to Dark Theme

Reset to Light Theme

Use this area to change the colors of this program.

There are two predefined color themes which you can revert to using the `Reset to Dark Theme` and `Reset to Light Theme` buttons.


After doing so you will be asked if you would also like to adjust the colors of the normal map, statistics and failures to the color theme defaults which we would recommend to do.

Access Control

There is an optional add-on module for FS-FlightControl that allows to control simulator access.

☐ Enable Simulator Access Control

If you have purchased this additional module you can enable the access control functionality using this check box.

 **Note:** It is highly recommended to also enable the *Settings Password Protection* as otherwise bypassing access control would be very simple for the user.

Simulator Access Control Settings

Once access control is enabled you can configure it here.

First you need to define the COM port used by the hardware transponder reader you have received from us. You can check the COM port in the Windows Device Manager.

You can also set the session expiration warning here which will warn the user a certain time before the session expires.

Furthermore a note text field can be enabled which allows the user to leave a note for the transponder usage log.

If you would like the users to be able to shutdown the simulator you can enable a shutdown button on the lock screen.

Both the transponder charge as well as the transponder usage log can be exported here as CSV files as well.

Selectable Time Packages

On the lock screen the users can choose between different session time packages which you can specify here.

Package




Package

Minutes: 15

Delete

You can set the number of minutes the simulator should be active when the user selects this time package.

Credits Map

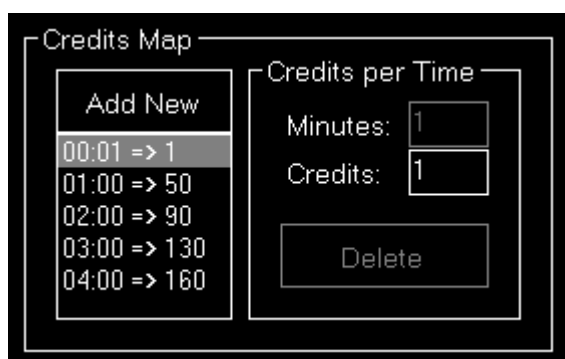

Credits Map

Add New

00:01 => 1
01:00 => 50
02:00 => 90
03:00 => 130
04:00 => 160

Credits per Time

Minutes: 1

Credits: 1

Delete

When the user starts a simulator session a certain amount of credits is deducted from his transponder.

This credits map defines how many credits are needed for a certain amount of time.

If there is no credits relation defined here that fits to the selected session time package exactly it will use the largest credits relation and fill it up with the next lower one till all minutes are charged.

That is also the reason why you cannot delete the one-minute (smallest possible unit) credits relation.

Credits per Time



Credits per Time

Minutes: 1

Credits: 1

Delete

Define here how many credits get charged for a certain number of minutes.

Card Block List



The screenshot shows a 'Card Block List' window. On the left, there is an 'Add New' button. Below it, a list of card serial numbers is displayed, with '04889C92E' highlighted. On the right, there is a 'Card Blocked' section with a 'Card Serial No.' field containing '04889C92EC5A8' and a 'Delete' button.

If a user reports a transponder for example as lost you can add its serial number to the card block list. In case the user then still tries to use this card it will be rejected.

Card Blocked



The screenshot shows a 'Card Blocked' window. It contains a 'Card Serial No.' field with the value '04889C92EC5A8' and a 'Delete' button below it.

Enter the serial number of the transponder that should be blocked here.

User Access Control

FS-FlightControl: User Access Control

Search:

Hans Pfaall (ID: 2)
Marv Rogers (ID: 3)
Roderick Usher (ID: 4)
William Wilson (ID: 1)

User
User ID: 1
Name: William Wilson
E-mail:
Cards: 3

Access Card
Card ID: 3
Serial No.: 04889C92EC5A80
Simulator: 21
Expiration: Select 4/3/2020 ☒ No Expiration
Credits: 1000 ☐ Unlimited

Free Credits
Per Day: 50 Used: 0
Per Week: 300 Used: 0
Per Month: 500 Used: 0
Per Year: 0 Used: 0

OK

Here you can change the simulator access settings of individual users.

First you can search for an existing user, also by scanning an existing transponder card.

A new user can be added here as well.

User

User
User ID: 1
Name: William Wilson
E-mail:
Cards: 1

Users are assigned a name and an optional e-mail address.

You can then add access card to a user.

A user can only be deleted again if no cards are assigned to this user.

Access Card

Access Card

Card ID: **3**
Serial No.: **04889C92EC5A80**
Simulator: ▼
Expiration: ☒ No Expiration
Credits: ☐ Unlimited

Read Data from Card

Write Data to Card

Free Credits

Per Day:	<input type="text" value="50"/>	Used: 0
Per Week:	<input type="text" value="300"/>	Used: 0
Per Month:	<input type="text" value="500"/>	Used: 0
Per Year:	<input type="text" value="0"/>	Used: 0

Reset Used

Delete

Here you can define expiration date of the transponder card as well as the amount of credits this card should have.

A card can be also valid indefinitely and credits can be set to unlimited as well.

This might be useful if you do not really need to control the access to the simulator, but would rather like to track its usage: In this case you can hand out cards with unlimited credits to your users and this way track who is using the simulator for how long without actually restricting the usage.

Free Credits

Free Credits

Per Day:	<input type="text" value="50"/>	Used: 0
Per Week:	<input type="text" value="300"/>	Used: 0
Per Month:	<input type="text" value="500"/>	Used: 0
Per Year:	<input type="text" value="0"/>	Used: 0

Reset Used

You can also set a certain amount of free credits per day, week, month or year. Not used credits will expire after the corresponding period of time.

This allows the user to use the simulator for a certain amount of time free of charge without reducing his actual card credits.


Use the button **Read Data from Card** to see also the currently used amount of the free credits. The button **Reset Used** allows you to set this back to zero again.

After you are changing the expiration date or any credits options do not forget to use the button **Write Data to Card** to actually save your changes to the card.


Other

In this section all other settings are located that do not fit into another category.


Input and Help

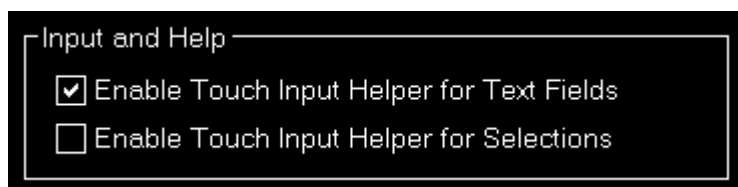

Here you can define if a touch input helper should be used for text and selection input fields.

 **Note:** While the Android or iOS app is connected both touch input helpers are activated automatically.

Display Options

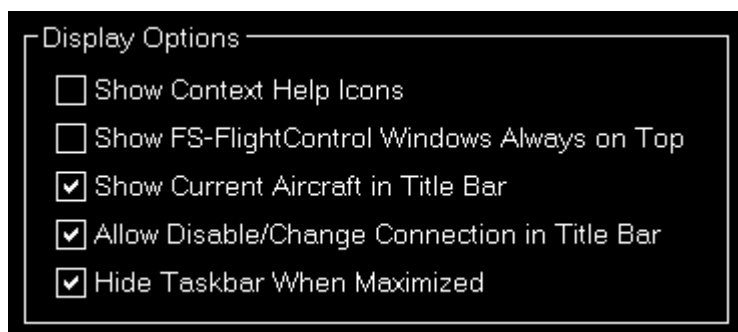


Additionally you can choose if the small help icons should be displayed in the top right corner of all sections.

Furthermore you can make the FS-FlightControl window to stay always on top of all other applications.

There is the option to show or hide the aircraft name as well as allow to disable or change the simulator connection by clicking on the connection text in the title bar.

You can also choose to hide the Taskbar when the application window is maximized.

Program Startup Options

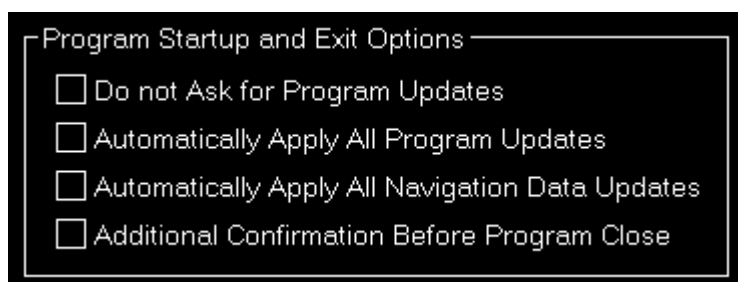

To allow a program start without user interaction you can define here that program updates as well as navigation data updates should always be applied without confirmation by the user.

Alternatively you can also disable the question regarding an update completely (which we do not recommend).

Furthermore you have the option here to activate an additional confirmation message before the program is really closed - in case of accidental clicks on the Exit button.

Online Network Status URLs




Here you can change the URLs where FS-FlightControl gets the status updates for VATSIM, IVAO and PilotEdge from.

This might be useful if you operate your own multi-player server. If you use, for example, the VATSIM format for providing online client information, you can inject this information into FS-FlightControl by pointing the VATSIM URL here to your own server.

You can also reset these URLs to their defaults.

Main Buttons

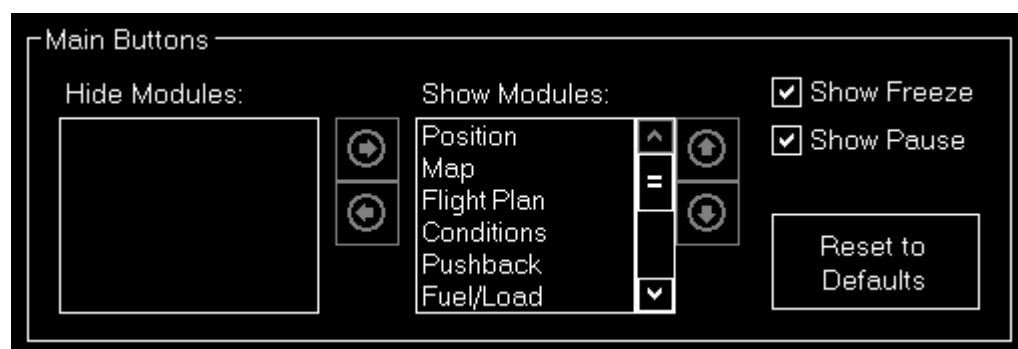


In case you do not need or use certain FS-FlightControl modules you can hide and even sort the related main buttons in the bottom of the screen.

You can also choose if you would like to see the Freeze and/or Pause button.

Use the button Reset to Default to restore all main buttons.

Unpause Delay

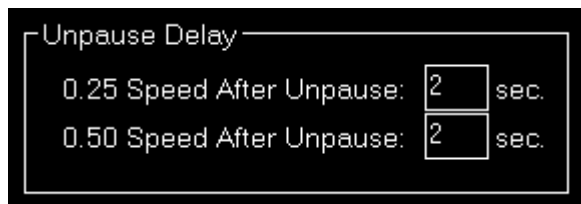

You can configure the unpause delay to your needs here.

This will be used to slowly accelerate your aircraft after the simulator was unpause through FS-FlightControl.

 **Note:** This option has no effect if you are connected to X-Plane.

Settings Password Protection




If you own a commercial license you can protect the settings with a password.

This ensure that only people who know this password will be able to access and change application settings.

To remove the password protection again leave the field empty and hit the button Set.

Print Options

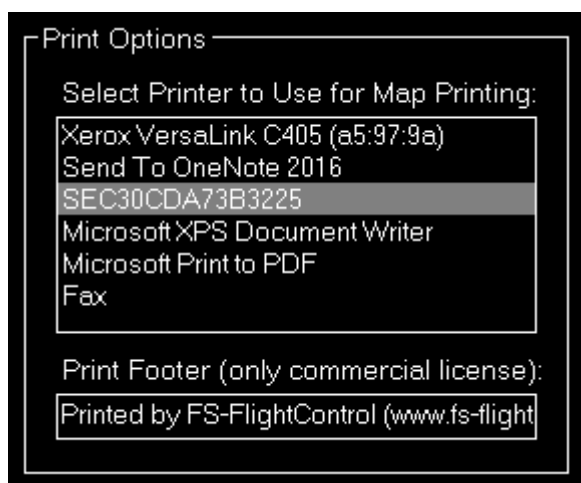


You can define here which printer should be used within this application.

Additionally, if you own a commercial license, you can also change the footer text or remove it completely.

Within the footer text you may use the placeholders {date}, {time} and {simulator_name} to insert the current date and time.


Reset Window Location/Size

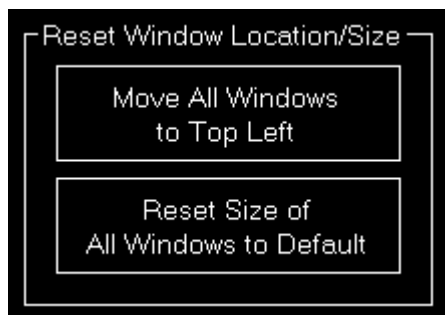

Use the button `Move All Windows to Top Left` if some application windows are no longer visible due to changes of connected monitors.


Use the button `Reset Size of All Windows to Default` in case you see application windows being unintentionally too large or small.

Send GPS Data

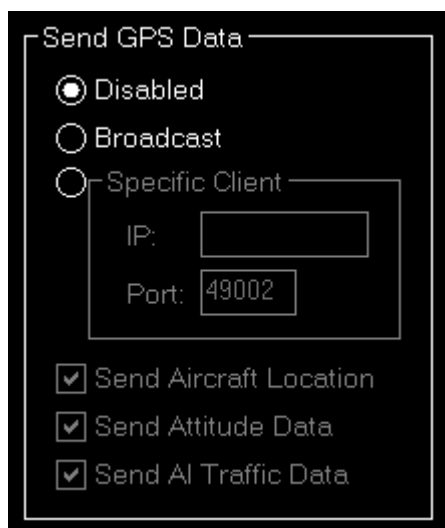


This section allows to enable a GPS data broadcast to feed thirdparty apps like ForeFlight, WingX Pro, Aerovie, FltPlan Go and SkyDemon with position data from your flight simulator.

Send to Specific Client



Normally it is enough to just broadcast the data to any client in the network, but if you would like to send it only to a specific one you can enter its IP address and port number here.

Other

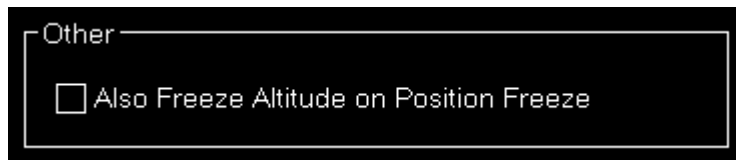

By default the button Freeze only freezes the aircraft position.

If you would like to have also the altitude frozen, you can select this here.

FS-FlightControl Manual:

<https://www.fs-flightcontrol.com/en/manual/>



PDF Generated on:

2024-05-01 03:06